


CONSEW Since 1898

MODEL 228R-11-2

ROLLER FOOT

WITH
VERTICAL AXIS HOOK
ROLLER PRESSER FEET
REVERSE FEED
AUTOMATIC LUBRICATION

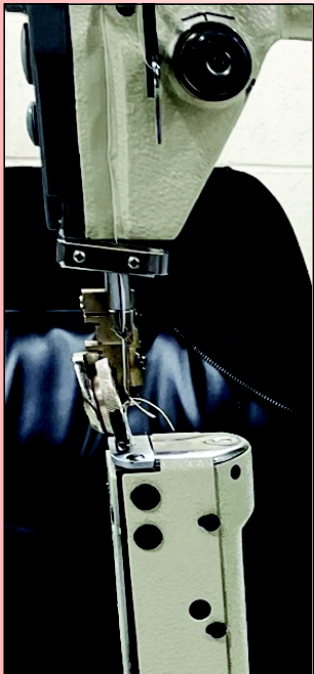

Closeup of 228R-11-2
needle and roller foot

**HIGH SPEED
POST TYPE
SINGLE NEEDLE
DROP FEED
LOCKSTITCH MACHINE**

Model 228R-11-2

POST BED - ROLLER FOOT



APPLICATIONS

- For sewing light and medium weight fabric, leather, vinyl, canvas and various laminated and coated materials
- Designed for stitching articles such as raincoats, underwear, corsets, brassieres and similar products
- Suitable for vamping, space stitching and tipping on shoes

FEATURES

- Vertical axis hook
- Drop feed
- Roller presser foot allows for turning of sharp corners and tight curves
- Single needle
- Stitches per minute - 3000*
- Reverse feed
- Automatic Lubrication (*has oil pump and oil pan*)

SPECIFICATIONS

Also Available:

MODEL 228R-11-1
POST BED - ROLLER FOOT
with Manual Lubrication



Speed, Max. (S.P.M.) *	3000*	Work Surface	1-7/8" x 2" (48 x 57 mm)
* Speed depends on operation, material and thread.		Post Height	7" (178 mm)
Clearance Under Foot	15/64" (6 mm)	Stitch Type	301
Needle Bar Stroke	1-1/4" (32 mm)		
Stitch Length, Max.	@ 4 s.p.i. (6.5 mm)		
Needle	135X7		
Bobbin	Metal	10656	
	Pre-wound	G	