

Models 255RBL-25 / 254RBL-25


WALKING FOOT

NEEDLE FEED

WITH

LARGE BOBBIN AND VERTICAL AXIS HOOK CENTRA-LUBE® SEMI-AUTOMATIC LUBRICATION SYSTEM 2½ S.P.I.(10mm) STITCH LENGTH REVERSE FEED



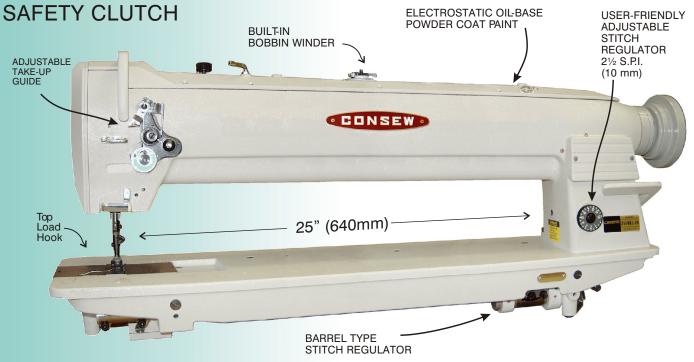



Model 254RBL-25
HEAVY DUTY, SINGLE NEEDLE
DROP FEED, NEEDLE FEED
LOCKSTITCH MACHINE

Model 255RBL-25

HEAVY DUTY
SINGLE NEEDLE
TRIPLE FEED:

DROP FEED, NEEDLE FEED
AND ALTERNATING
(WALKING) PRESSER FEET
LOCKSTITCH MACHINE



Models 255RBL-25 / 254RBL-25

Triple Feed Extra Long Stitch Drop Feed & Needle Feed

APPLICATIONS

- For sewing light to heavy-weight fabric, canvas, leather, vinyl, synthetics and various laminated and coated materials
- Designed for stitching such products as auto, boat and furniture upholstery, tarpaulins, covers, awnings, tents, umbrellas, handbags, luggage, travelware accessories, sports and camping equipment, wearing apparel, outdoor clothing, footwear, foundation garments, orthopedic appliances, etc.



255RBL-3 Foot





FEATURES

- Centra-Lube® semi-automatic lubrication svstem
- Automatic hook lubrication
- Oil fed take-up
- Large bobbin and vertical axis hook
- Compound feed, walking foot mechanism assures uniform stitching
- Simple wing nut adjustment permits raising and lowering of the center foot

- Safety clutch prevents the hook from being damaged
- Safety-type handwheel
- Stitch length indicator on outside of
- All sizes of cording feet available
- Standard attachments easily installed
- Reverse stitching
- (255RBL-25) Long Stitch 2¹/₂ SPI

254RB-3 Large bobbin and vertical axis hook and reverse feed and High-lift 255RBL-25 - Large bobbin and vertical axis hook, reverse feed - 25" long arm - 254RBL-25 **255RBL** Special order, custom made in USA, up to 30" long arm -**254RBL**

SPECIFICATIONS

255RLB-25

Speed, Max. (S.P.M.) *		2200
Clearance Under Foot		9/16" (14mm)
Needle Bar Stroke		1-5/16" (33 mm)
Stitch Length, Max.		2-1/2 s.p.i. (10 mm)
Needle		135 x 17
D. L.L.	Metal	15041
Bobbin	Pre-wound	U
Hook		15040
Bed Size		7" x 28-1/4" (177 x 718 mm)
Work Space		25" (640 mm)
Stitch Type		301

^{*} Speed depends on thread, material and operation.

254RBL-25

Speed, Max. (S.P.M.) *		2800
Clearance Under Foot		9/16" (14mm)
Needle Bar Stroke		1-5/16" (33 mm)
Stitch Length, Max.		4 s.p.i. (5.6 mm)
Needle		135 x 17
D. b.b.t.	Metal	15041
Bobbin	Pre-wound	U
Hook		15040
Bed Size		7" x 28-1/4" (177 x 708 mm)
Work Space		25" (640 mm)
Stitch Type		301