



Since 1898  
**CONSEW**

# Model 267RB Series

**HEAVY DUTY  
WALKING FOOT:  
DROP FEED, NEEDLE FEED  
AND ALTERNATING PRESSER FEET  
LOCKSTITCH MACHINES**

**267RB SINGLE  
NEEDLE**

**267RB-D DOUBLE  
NEEDLE**

**267RB-D4 FOUR NEEDLE  
NEEDLE FEED**



267RB  
Single  
Needle



267RB-D  
Double  
Needle



267RB  
Single  
Needle

**WITH  
LARGE BOBBIN  
DROP-IN BOBBIN(S)  
REVERSE FEED  
HIGH NEEDLE BAR  
STROKE AND  
FOOT CLEARANCE  
SAFETY CLUTCH**

# Models 267RB Series

## APPLICATIONS

- For sewing medium to heavy-weight fabrics such as: canvas, leather, vinyl, synthetics and various laminated and coated materials
- Designed for stitching such products as auto interiors, boat and furniture upholstery, tarpaulins, covers, awnings, tents, umbrellas, handbags, luggage, travelware accessories, sports and camping equipment, apparel, outdoor clothing, footwear, foundation garments, orthopedic appliances, etc.

## ADDITIONAL FEATURES

- Compound feed, walking foot mechanism assures uniform stitching
- Presser foot step adjustment for climbing over seams
- Stitch length adjustment located on reverse lever
- Safety clutch prevents the hook from being damaged
- Safety-type handwheel belt guard
- Built-in bobbin winder
- Assorted cording, edge guide, binding, and other feet available
- Standard attachments easily installed
- Quick release knee lifter



267RB-D: Dual Drop-in Bobbins



Built-in Bobbin Winder




Safety Clutch



Quick Release Knee Lifter



Reverse and Stitch Regulator Lever

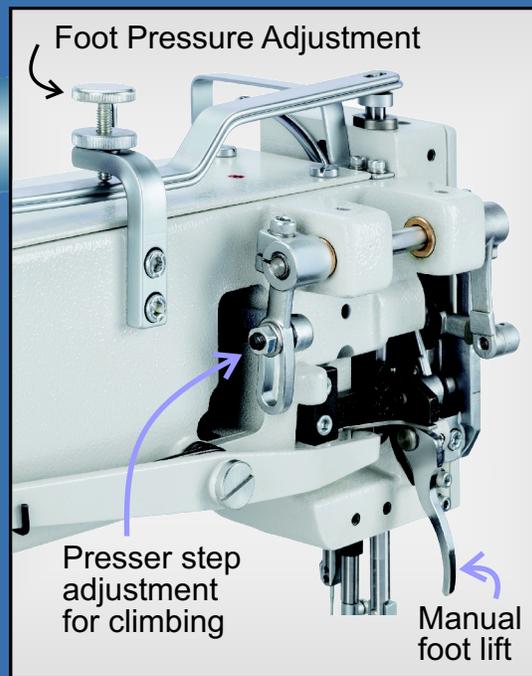

Foot Pressure Adjustment

Presser step adjustment for climbing

Manual foot lift

## SPECIFICATIONS

|                                | 267RB             | 267RB-D           | 267RB-D4          |
|--------------------------------|-------------------|-------------------|-------------------|
| No. of Needles                 | Single            | Double            | Four              |
| Speed, Max. (S.P.M.) *         | 2000              | 2000              | 2000              |
| Clearance Under Foot           | 3/8" (10 mm)      | 3/8" (10 mm)      | 3/8" (10 mm)      |
| Stitch Length, Max.            | 4.2 s.p.i. (6 mm) | 4.2 s.p.i. (6 mm) | 4.2 s.p.i. (6 mm) |
| Needle System                  | 134-35            | 134-35            | 134-35            |
| Dual Needle Standard Spacing   | —                 | 6 mm              | —                 |
| Dual Needle Spacings Available | —                 | 3 mm to 40 mm     | —                 |
| Bobbin                         | Size              | 26 mm             | 26 mm             |
|                                | Pre-wound         | M                 | M                 |
| Metal Bobbin Part #            | 167-00-180-0      | 167-00-180-0      | 167-00-180-0      |
| Stitch Type                    | 301               | 301               | 301               |

\* Speed depends on thread, material and operation.