



Since 1898
CONSEW[®]

Model 269RB Series

HEAVY DUTY
CYLINDER ARM
WALKING FOOT:
DROP FEED, NEEDLE FEED
AND ALTERNATING PRESSER FEET
LOCKSTITCH MACHINES

269RB SINGLE
NEEDLE

269RB-D DOUBLE
NEEDLE

269RB
3" (76mm)
DIAMETER
CYLINDER
BED



269RB
SINGLE
NEEDLE



269RB-D
DOUBLE
NEEDLE

WITH
LARGE DROP-IN BOBBIN(S)
REVERSE FEED
HIGH NEEDLE BAR STROKE
AND FOOT CLEARANCE
SAFETY CLUTCH

APPLICATIONS


- For sewing medium to heavy-weight fabrics such as: leather, vinyl, upholstery, synthetics, canvas and various coated and laminated materials.
- Designed for stitching tubular and curved work.
- Suitable for sewing such products as caps, cushions, boots, shoes, auto interiors, boat and furniture upholstery, tarpaulins, covers, sails, tents, awnings, umbrellas, tops, bags, luggage, handbags, travelware accessories, sports and camping equipment, apparel, orthopedic appliances, slippers, filters, etc.

ADDITIONAL FEATURES


- The 269RB-D has two needles for sewing two parallel lines of stitches (*Various needle gauges available*)
- Compound feed, walking foot mechanism assures even feeding of several plies or of slippery materials
- Stitch regulator is on reverse feed lever
- Presser foot step adjustment for climbing over seams
- Built-in bobbin winder
- Proven design for long lasting service



269RB single needle, walking foot

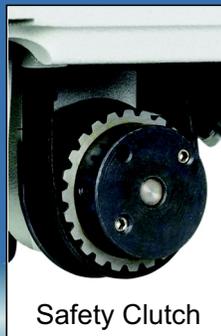

Safety Clutch

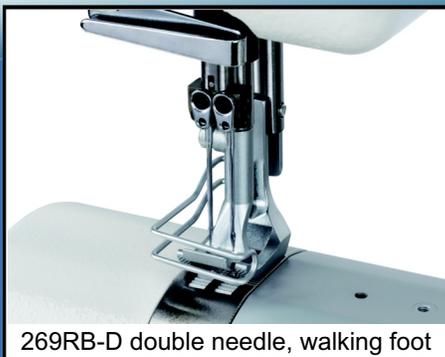


269RB-D double needle, walking foot



Built-in Bobbin Winder



Reverse and Stitch Regulator Lever

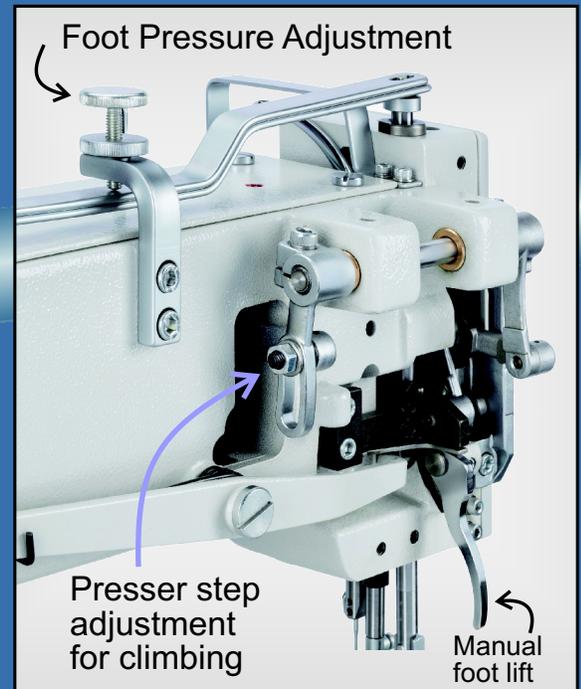

Foot Pressure Adjustment

Presser step adjustment for climbing

Manual foot lift

SPECIFICATIONS

Speed, Max. (S.P.M.)*	2000*
Clearance Under Foot	(10 mm)
Stitch Length, Max.	@4 s.p.i. (6 mm)
Bobbin - Pre-wound	U

Cylinder dia.	3" dia. (76 mm)
Stitch Type	301
Needle System	134-35
Standard Dual Needle Spacing	6 mm
Dual Needle Spacing Range:	from 4.8 mm to 24 mm

* Speed depends on materials, thread and operation.