

CONSEW Since 1898**MODEL 287RB-2****WALKING FOOT**


WITH

CENTRA-LUBE® SEMI-AUTOMATIC LUBRICATION SYSTEM

VERTICAL AXIS ROTARY HOOK

REVERSE FEED

SAFETY CLUTCH

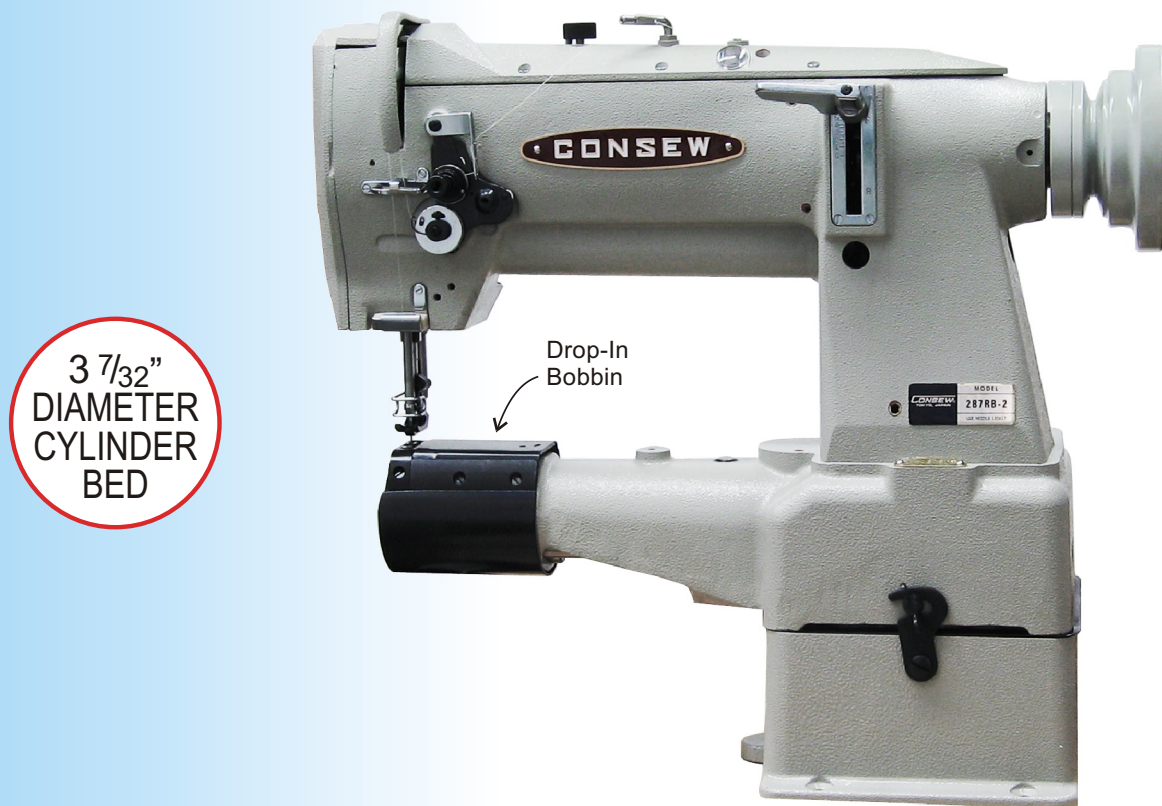**CYLINDER ARM**

HEAVY DUTY CYLINDER ARM
SINGLE NEEDLE
DROP FEED, NEEDLE FEED
WALKING FOOT
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE

Model 287RB-2

APPLICATIONS

- For sewing light to heavy-weight fabrics, leather, vinyl, upholstery, synthetics, canvas and various coated and laminated materials
- Designed for stitching tubular and curved work.
- Suitable for sewing such products as caps, cushions, boots, shoes, auto, boat and furniture upholstery, tarpaulins, covers, sails, tents, awnings, umbrellas, tops, bags, luggage, handbags, travelware accessories, sports and camping equipment, wearing apparel, orthopedic appliances, slippers, etc.
- Tape Binding with synchronized binder, Model 287RBFS

FEATURES

- Vertical axis rotary hook
- Compound feed, walking foot mechanism assures even feeding of several plies or of slippery materials
- Stitches per minute — 2300*
- Centra-Lube® semi-automatic lubrication system
- Reverse feed – models 287RB-2 / 287RBFS
- Safety clutch prevents the hook from being damaged
- Simple adjustment permits the raising and lowering of the center foot which allows for sewing of different thicknesses of material

SPECIFICATIONS

Speed, Max. (S.P.M.)*	2300
Clearance Under Foot: by hand	11/32" (8.5mm)
by pedal	35/64" (14mm)
Needle Bar Stroke	1 5/16" (33.2mm)
Stitch Length, Max.	1/4" (6.2 mm)
Bobbin	Metal 10656
	Pre-wound U
Hook	13086
Needle	135 x 17
Bed Size	3 7/32" dia. x 10 9/16" (65mm dia. x 268mm)
Work Space	10 5/32" (258 mm)
Stitch Type	301

* Speed depends on materials, thread and operation.




287RB Bobbin

Available Option:
Adjustable, spring-loaded, retractable,
SWING ARM GUIDE.



CLINTON INDUSTRIES
"SERVING THE SEWING INDUSTRY SINCE 1954"

Optionally available from Clinton Industries:
Automatic Footlift and Automatic Backtack

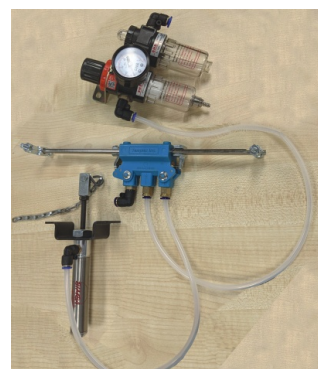

FOOTLIFT



BACKTACK