

Since 1898
CONSEW®

MODEL 287RB-3

WALKING FOOT

WITH

CENTRA-LUBE® SEMI-AUTOMATIC LUBRICATION SYSTEM

VERTICAL AXIS ROTARY HOOK

REVERSE FEED

SAFETY CLUTCH



3 7/32"
DIAMETER
CYLINDER
BED

Drop-In
Bobbin



Closeup of 287RB-3 needle

HEAVY DUTY CYLINDER ARM
SINGLE NEEDLE
DROP FEED, NEEDLE FEED
WALKING FOOT
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE

APPLICATIONS

- For sewing medium to heavy-weight fabrics, leather, vinyl, upholstery, synthetics, canvas and various coated and laminated materials
- Designed for stitching tubular and curved work.
- Suitable for sewing such products as caps, cushions, boots, shoes, auto, boat and furniture upholstery, tarpaulins, covers, sails, tents, awnings, umbrellas, tops, bags, luggage, handbags, travelware accessories, sports and camping equipment, wearing apparel, orthopedic appliances, slippers, etc.
- Tape Binding with synchronized binder, Model 287RBFS



FEATURES

- Vertical axis rotary hook
- Compound feed, walking foot mechanism assures even feeding of several plies or of slippery materials
- Stitches per minute — 2300*
- Centra-Lube® semi-automatic lubrication system
- Reverse feed – models 287RB-2 / 287RBFS
- Safety clutch prevents the hook from being damaged
- Simple adjustment permits the raising and lowering of the center foot which allows for sewing of different thicknesses of material


SPECIFICATIONS

Speed, Max. (S.P.M.)*	2300
Clearance Under Foot: by hand	11/32" (8.5 mm)
	by pedal 35/64" (14 mm)
Needle Bar Stroke	1 5/16" (33.2 mm)
Stitch Length, Max.	1/4" (6.2 mm)
Bobbin	Metal 10656
	Pre-wound U
Hook	13086
Needle	135 x 17
Bed Size	3 7/32" dia. x 10 9/16" (65 mm dia. x 268 mm)
Work Space	10 5/32" (258 mm)
Stitch Type	301


* Speed depends on materials, thread and operation.



Available Option:
Adjustable, spring-loaded, retractable, SWING ARM GUIDE.

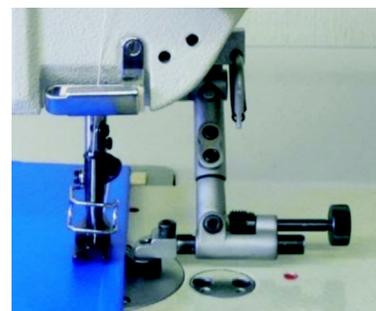

Optionally available from Clinton Industries:
Automatic Footlift and Automatic Backtack

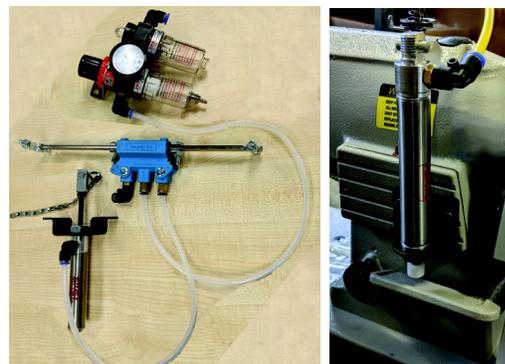

FOOTLIFT

BACKTACK