

CONSEW Since 1898

MODEL 289RB-2

WITH
CENTRA-LUBE® - SEMI-AUTOMATIC LUBRICATION SYSTEM
LARGE VERTICAL AXIS ROTARY HOOK AND BOBBIN
REVERSE FEED
SAFETY CLUTCH

WALKING FOOT



Available as a special order:



MODEL 289RB-HLP-2
with
17-7/16" (443 mm) post height


HIGH SPEED
POST TYPE
SINGLE NEEDLE
DROP FEED, NEEDLE FEED
WALKING FOOT
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE

POST BED

Model 289RB-2

APPLICATIONS

- For sewing medium to heavy weight fabrics, leather, canvas, vinyl, synthetics and various coated and laminated materials
- For stitching uneven, hollow, tubular and curved articles
- Designed for stitching such products as boots, shoes, gloves, luggage, handbags, overalls, raincoats, bags, umbrellas, awnings, covers, tarpaulins, tents, sports and camping equipment, wearing apparel, outdoor clothing, etc.
- Suitable for edge stitching operations, and top stitching.

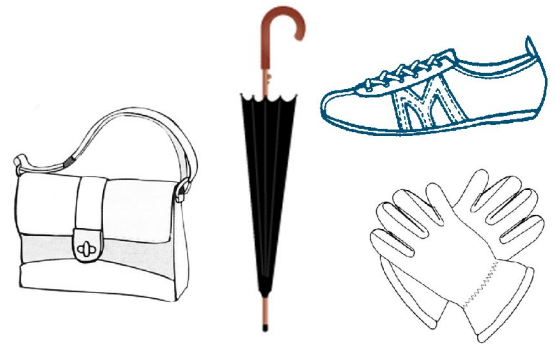

FEATURES

- Centra-Lube® semi-automatic lubrication system
- Oil fed take-up
- Safety clutch prevents the hook from being damaged
- Large bobbin allows for longer operation
- Large vertical axis hook allows for use of thick thread and therefore ornamental stitching can be obtained
- Compound feed, walking foot mechanism assures even feeding of material
- Reverse stitching
- Simple adjustment permits raising and lowering of the center foot which allows for sewing different thicknesses of material

SPECIFICATIONS

Speed, Max. (S*P.M.)	2400*
Clearance Under Foot	25/64" (10 mm)
Needle Bar Stroke	1-5/16" (33 mm)
Stitch Length, Max.	4 s.p.i. (6 mm)
Needle	135 x 17
Bobbin	Metal 15041
	Pre-wound S and U
Hook	14005
Bed Size	7" x 20 ³ / ₈ " (178 mm x 518 mm)
Work Surface	2 ¹ / ₈ " x 2" (54 mm x 51 mm)
Post Height	7" (178mm)
Stitch Type	301

* Speed depends on operation, material and thread.

