

CONSEW Since 1898

MODELS 333RB-3 / 333RBL-25

TWO NEEDLE

WITH
CENTRA-LUBE® SEMI-AUTOMATIC LUBRICATION SYSTEM
LARGE VERTICAL AXIS HOOKS AND BOBBINS
REVERSE FEED - MODELS 333RB-3/333RBL-3
SAFETY CLUTCH



DOUBLE NEEDLE



Model 333RB-3



Model 333RBL-25

**HIGH SPEED, TWO NEEDLE
DROP FEED, NEEDLE FEED
LOCKSTITCH MACHINE**

Also available: 333B large bobbin - no reverse

Models 333RB-3 / 333RBL-25

APPLICATIONS

- Designed for stitching medium to medium-heavy weight fabrics, leather, canvas, vinyl, synthetics and various laminated and coated materials
- Suitable for sewing auto, boat and furniture upholstery, boat covers, sails, awnings, tents, light tarpaulins, camping equipment, cot and beach chair covers, slip covers, draperies, mattress binding, luggage, travelware accessories, wearing apparel, coats, work clothes, foundation garments, etc.
- Designed for stitching reinforced and parallel stitches
- Suitable for such operations as attaching zippers, lap seam felling, staying shoe linings, and general double needle seaming, binding, taping and piping

FEATURES

- Large vertical axis hooks and bobbins assures longer operation between bobbin changes
- The compound feed mechanism assures perfect and uniform stitching and eliminates slippage
- Centra-Lube® semi-automatic lubrication system
- Automatic hook lubrication
- Oil fed take-up
- Reverse stitching - Models 333RB-3 /333RBL-25
- Large range of gauge sets available
- Safety clutch prevents the hooks from being damaged
- Synchronized puller available (add suffix -P)

Available Option: Adjustable, spring-loaded, retractable, SWING ARM GUIDE. (Works on both 1 or 2 needle machines.)




CLINTON INDUSTRIES
"SERVING THE SEWING INDUSTRY SINCE 1954"

Optionally available from Clinton Industries:
Automatic Footlift and Automatic Backtack



Footlift for RB

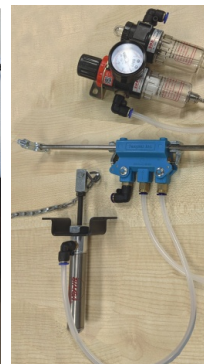

Footlift for RBL



Backtack

333RB-3 – Large hooks and bobbins and reverse feed
333RBL-25 – Large hooks and bobbins, reverse feed and LONG ARM



SPECIFICATIONS

Speed, Max. (S.P.M.) *	333RB-3	2800
	333RBL-25	2200
Clearance Under Foot	21/64" (8.5mm)	
Needle Bar Stroke	1-5/16" (33 mm)	
Stitch Length, Max.	4 s.p.i. (6.5 mm)	
Needle	135 x 17	
Bobbin	Metal	15041
	Pre-wound	S or U

Hook	15502	
Bed Size	333RB-3	7" x 20-3/8" (177 x 518 mm)
	333RBL-25	7" x 28-1/4" (177 x 718 mm)
Work Space	333RB-3	10" (254mm)
	333RBL-25	25" (640 mm)
Standard Needle Spacing	1/4" (6.4 mm)	
Available Needle Spacings	1/16" (1.6mm) – 1-1/2" (38.1mm)	
Stitch Type	301	

* Speed depends on operation, material and thread