

CONSEW Since 1898

Model 357R-2

TWO NEEDLE / POST MACHINE
ROLLER PRESSER FOOT

WITH
VERTICAL AXIS HOOKS
ROLLER PRESSER FOOT
REVERSE FEED
SAFETY CLUTCH
OFFSET NEEDLES – NARROW GAUGES ONLY



HIGH SPEED
POST TYPE
TWO NEEDLE
DROP FEED
LOCKSTITCH MACHINE

POST BED

Model 357R-2



APPLICATIONS

- For sewing light to medium weight fabrics, leather, canvas, vinyl, synthetics and various coated and laminated materials
- Suitable for stitching hollow, tubular and curved articles
- For stitching ornamental and functional two needle seams
- Designed for stitching such products as wearing apparel, shoes, boots, raincoats, foundation garments, luggage, handbags, travelware accessories, leather goods, etc.
- Also used for attaching vamps and backstraps or inserting counters on heavy shoes

FEATURES

- Vertical axis hooks
- Drop feed
- Safety clutch mechanism prevents the hooks from being damaged
- Reverse feed for back stitching, tacking and seam reinforcing
- Stitches per minute – 3000*
- Roller presser foot allows turning of sharp corners and tight curves
- Flat presser foot available


Available Option:
Adjustable,
spring-loaded,
retractable,
SWING ARM
GUIDE.



SPECIFICATIONS



Optionally available
from Clinton Industries:
Automatic Footlift
and
Automatic Backtack

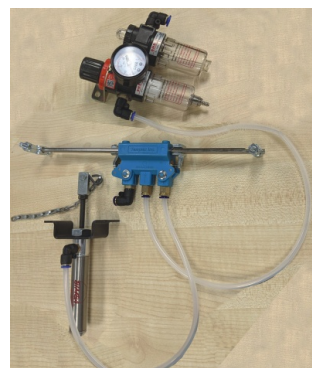

FOOTLIFT



BACKTACK

Speed, Max. (S.P.M.) *	3000*	Hook	12530
(* Speed depends on operation, material and thread.)		Bed Size	7" x 20 ³ / ₈ " (177 mm x 518 mm)
Clearance Under Foot	15/64" (6 mm)	Work Space	1 ⁷ / ₈ " x 3 ¹ / ₂ " (48 mm x 85 mm)
Needle Bar Stroke	1-1/4" (32 mm)	Post Height	7" (178 mm)
Stitch Length, Max.	5 s.p.i. (5 mm)	Stitch Type	301
Needle with Roller Presser Foot	DPXF22 or 134S	Needle gauges available:	
with Flat Presser Foot	135 x 7		
Bobbin Metal	10656		
Pre-wound	G	with Roller Presser Foot	3/64" – 3/32" (1.2–2.4 mm)
		with Flat Presser Foot	1/16" – 1/2" (1.5–12.7 mm)