

CONSEW Since 1898


Model 369RB-2

TWO NEEDLE / SPLIT NEEDLE BAR

WITH
CENTRA-LUBE® SEMI-AUTOMATIC LUBRICATION SYSTEM
LARGE VERTICAL AXIS ROTARY HOOKS AND BOBBINS
DISENGAGEABLE RIGHT AND LEFT NEEDLE BARS
REVERSE FEED
SAFETY CLUTCH

WALKING FOOT


**Double Needle
Split Bar**



ANGULAR STITCHING




**LARGE
BOBBIN**

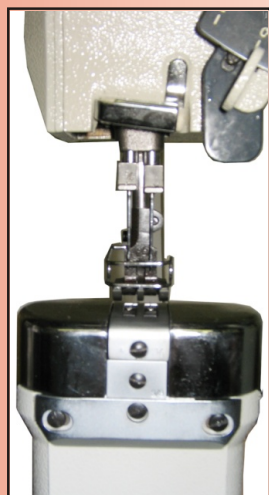

**HEAVY DUTY
HIGH SPEED
POST TYPE
TWO NEEDLE
ANGULAR STITCHING
(SPLIT NEEDLE BAR)
DROP FEED, NEEDLE FEED
WALKING FOOT
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE**


POST BED

Model 369RB-2



APPLICATIONS

- For sewing medium to medium heavy-weight fabrics, leather, canvas, vinyl, synthetics and various coated and laminated materials
- Designed for sewing operations which require decorative or functional angular stitching such as collars, pockets, shoe uppers, auto, boat and furniture upholstery, slacks, shirts, etc.
- Designed for stitching such products as overalls, raincoats, luggage, travelware accessories, bags, umbrellas, awnings, covers, tarpaulins, tents, wearing apparel, outdoor clothing, underwear, etc.
- General / parallel two-needle stitching with split bar for making even angle turns.
- Suitable for stitching uneven, hollow, tubular and curved articles
- Also for secondary operations on finished articles such as attaching braids, pockets, tapes, etc.

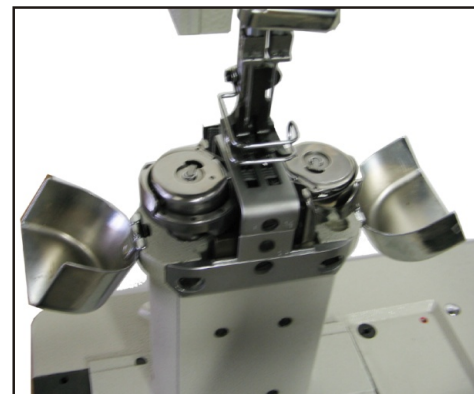

Showing the Two Bobbins

FEATURES

- Compound feed, walking foot mechanism assures perfect feeding of sewing material
- Large hooks and bobbin cases with their own thread take-up mechanism assure uniform and perfect stitching with minimal bobbin changes
- Easy operation of disengageable right and left needle bars by use of finger-touch lever
- Centra-Lube® semi-automatic lubrication system
- Oil fed take-up
- Stitches per minute - 2200
- Reverse stitching
- Various gauge sets available
- Safety clutch protects the hooks from being damaged


Available Option:
Adjustable, spring-loaded, retractable, SWING ARM GUIDE.



SPECIFICATIONS

Speed, Max. (S.P.M.) *	2200*
(* Speed depends on operation, material and thread.)	
Clearance Under Foot	11/32" (8.5 mm)
Needle Bar Stroke	1-1/4" (32 mm)
Stitch Length, Max.	5 s.p.i. (5 mm)
Needle	135 x 17
Bobbin	Metal 16408
	Pre-wound U

Optionally available from Clinton Industries:
Automatic Footlift and Automatic Backtack

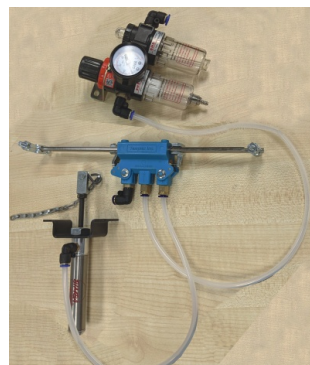

FOOTLIFT



BACKTACK

Hook	14005
Bed Size	7" x 20 3/8" (177 mm x 518mm)
Working Surface	2 1/8" x 4" (54 x 101 mm)
Post Height	7" (178mm)
Stitch Type	301
Needle gauges available: 3/16" - 1" (4.7 - 25.4 mm)	