

Model 387RB-3

WITH
CENTRA-LUBE®
SEMI-AUTOMATIC LUBRICATION SYSTEM
LARGE VERTICAL AXIS ROTARY HOOKS AND BOBBINS
REVERSE FEED
SAFETY CLUTCH

Also available 384RB-2 (needle feed)

LARGE
BOBBIN

DOUBLE NEEDLE



387RB-3
3 7/32"
DIAMETER
CYLINDER
BED



387RB-3 Walking Foot

HEAVY DUTY
CYLINDER ARM
TWO NEEDLE
DROP FEED, NEEDLE FEED
WALKING FOOT
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE

Model 387RB-3


Also available 384RB-2 (needle feed)

APPLICATIONS

- For sewing light to heavy-weight fabrics, leather, vinyl, upholstery, synthetics, canvas and various coated and laminated materials
- Designed for stitching tubular and curved work.
- Suitable for sewing such products as caps, cushions, boots, shoes, auto, boat and furniture upholstery, tarpaulins, covers, sails, tents, awnings, umbrellas, tops, bags, luggage, handbags, travelware accessories, sports and camping equipment, wearing apparel, orthopedic appliances, slippers, filters, etc.

FEATURES

- Two needle mechanism readily makes two parallel lines of stitches
- Large vertical axis rotary hooks and bobbins assure longer operation between bobbin changes
- Compound feed, walking foot mechanism assures even feeding of several plies or of slippery materials
- Centra-Lube® semi-automatic lubrication system
- Reverse feed
- Safety clutch prevents the hook from being damaged
- Simple adjustment permits the raising and lowering of the center foot which allows for sewing of different thicknesses of material
- Various needle gauges available

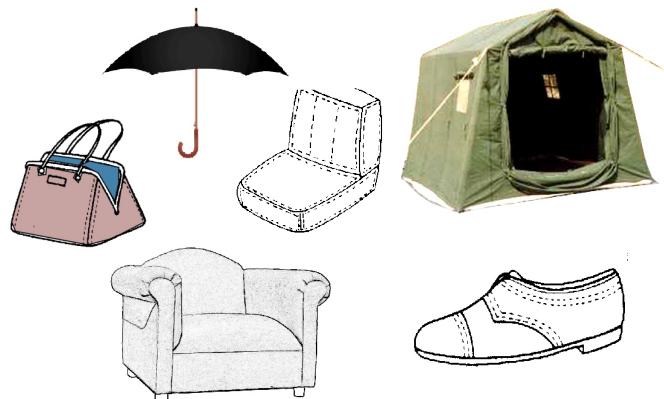


Available Option:
Adjustable, spring-loaded, retractable,
SWING ARM GUIDE.



 **CLINTON INDUSTRIES**
"SERVING THE SEWING INDUSTRY SINCE 1954"

Optionally available from Clinton Industries:
Automatic Footlift and Automatic Backtack

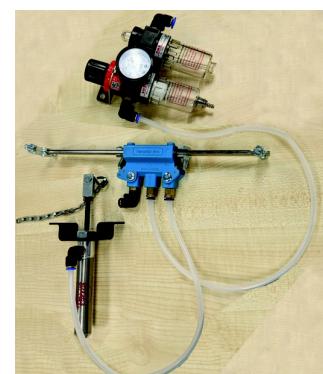

FOOTLIFT



BACKTACK

Speed, Max. (S.P.M.)*	2500*
Clearance Under Foot	11/32" (8.5mm)
Needle Bar Stroke	1 5/16" (33.2mm)
Stitch Length, Max.	@4 s.p.i. (6.2 mm)
Bobbin	Metal 15041
	Pre-wound S
Hook	13719
Bed Size	3 7/32" dia. x 13" (82mmØ x 330mm)
Work Space	10" (254 mm)
Stitch Type	301
Needle	135 x 17
Standard Needle Spacings:	1/8", 1/4", 3/8", 1/2"

* Speed depends on materials, thread and operation.