



CONSEW® Since 1898

MODELS 5457RB-1

5457RB-DD

**DIRECT DRIVE VERSION
with NEEDLE POSITIONING**

WITH
HORIZONTAL AXIS TRANSVERSE ROTARY HOOK
AUTOMATIC LUBRICATION
LARGE BOBBIN, REVERSE FEED
BUILT IN BOBBIN WINDER
ROTARY TAKE-UP
1-STEP AND 3-STEP ZIG ZAG PATTERNS.

-1A

-3A

*Comes with
two cams.*



5457RB-1



5457RB-DD

**ULTRA HIGH SPEED
SINGLE NEEDLE
DROP FEED
ROTARY TAKE-UP, ZIG-ZAG
LOCKSTITCH MACHINES**




Models 5457RB-1 and 5457RB-DD

APPLICATIONS

- For sewing light to medium weight fabrics
- For use with such products as foundation garments, brassieres, underwear, apparel and accessory groups

FEATURES

- Automatic lubrication
- Horizontal axis transverse rotary hook
- Zig-zag stitch at center position or either to left or right of center position
- Stitches per minute - 5000*
- Reverse stitching
- Large Bobbin
- Dial-type zig-zag width adjustment
- Rotary take-up lever
- Dial-type feed adjustment
- Interchangeable pattern stitch cams (1:1 and 1:3)
- Needle Positioning is on the 5457-DD only

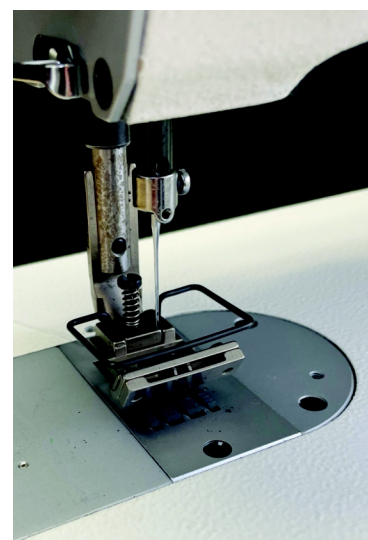

Closeup of
5457RB-1 needle

SPECIFICATIONS

5457RB-1

Max sewing speed *	Up to 5,000 s.p.m.	
Presser	By hand	5.5 mm
Foot Lift	By knee	10 mm
Needle size	DPx5 #10	
Weight	@ 40 kg	
Max Zig-Zag Width	10mm (8mm is Factory setting)	
Stitch Type	304 (standard 1-stitch)	

* Speed depends on operation, materials and thread

5457RB-DD

Max sewing speed *	Up to 5,000 s.p.m.	
Presser	By hand	5.5 mm
Foot Lift	By knee	10 mm
Needle size	DPx5 #10	
Weight	@ 40 kg	
Max Zig-Zag Width	10mm (8mm is Factory setting)	
Stitch Type	304 (standard 1-stitch)	

Power 220 V Single Phase
Optional: 110v converter sold separately