



Since 1898
CONSEW[®]

Model 69R Series

HEAVY DUTY
NARROW CYLINDER ARM
WALKING FOOT:
DROP FEED, NEEDLE FEED
AND ALTERNATING PRESSER FEET
LOCKSTITCH MACHINES

69R STANDARD BOBBIN
69RFS STANDARD BOBBIN+FS
FS model is equipped for
feed synchronized binder



69R

NARROW
1.81" | 46 mm
DIAMETER
CYLINDER
BED



69RFS

WITH
SIDE LOAD BOBBIN
REVERSE FEED
SAFETY CLUTCH





Models 69R / 69RFS

APPLICATIONS

- For sewing medium to heavy-weight fabrics, leather, vinyl, upholstery, synthetics, canvas and various coated and laminated materials.
- Especially designed for products with narrow openings.
- For stitching tubular and curved work.
- Suitable for sewing such products as hats, caps, shoes, sandals, slippers, tarpaulins, covers, sails, tents, awnings, umbrellas, bags, luggage, handbags, travelware accessories, wearing apparel, etc.
- Tape binding — Model 69RFS

ADDITIONAL FEATURES

- Narrow cylinder arm - 1.81" – 46 mm diameter
- Presser foot step adjustment for climbing over seams
- Close-cropped casting gives easier access to the needle

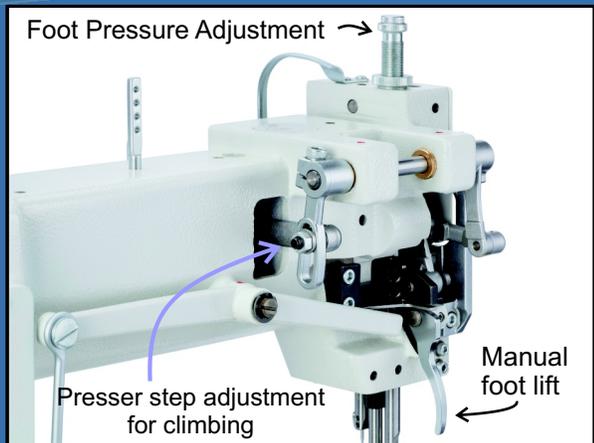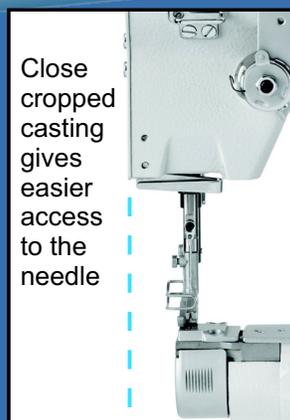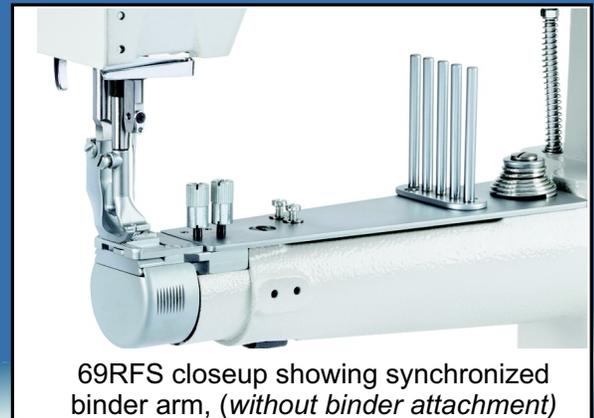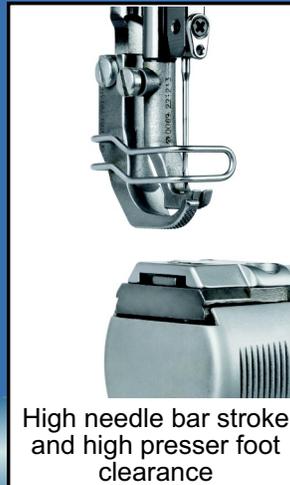

SPECIFICATIONS

Model	Sewing speed (S.P.M.) *	Presser Lift Hand / Foot	Max. Stitch Length	Cylinder diameter	Bobbin Style	Needle System
69R 69RFS	2000	6 mm 10 mm	5 mm	46 mm	G part # 069-00-580-0	134

* Speed depends on material & thread.