


Since 1898
CONSEW®

Model 733R-8

WITH
EXTRA LARGE OSCILLATING SHUTTLE HOOK AND BOBBIN
EXTRA HIGH FOOT LIFT— 40 mm
REVERSE FEED



Model 733R-8

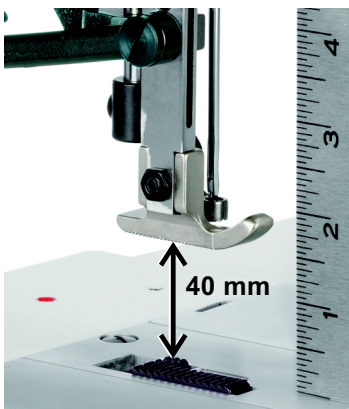

Detail of 733R-8 showing
40 mm extra high foot lift
Single row feed
with left half-foot

EXTRA HEAVY DUTY
EXTRA LARGE WORKSPACE
SINGLE NEEDLE
DROP FEED
ALTERNATING
PRESSER FEET
LOCKSTITCH MACHINE

Models 733R-8

APPLICATIONS

- For stitching extra heavy-weight materials. Can sew up to size Tex 700 cord (thread).
- Designed for such operations and products as extra heavy duty harnesses and slings (*can sew up to 12,000 ppi webbing,*) safety and logging belts, cargo slings, tents, sails, tarpaulins and covers, fabric structures, construction barriers, buffing wheels, parachutes, balloons, industrial bags, boot stitching, book binding.

FEATURES

- Synchronized upper and lower feeding mechanism assures uniform stitching
- Alternating presser feet
- Steel insert for take-up hinge
- Reverse stitching - hand or foot operated
- Stitch regulator - hand or foot operated
- Presser foot lift - hand or foot operated
- 40 mm presser foot lift (Can sew up to 7 plies of 9800 ppi webbing)
- Single row feed dog (with left half-foot)
- *Optional:* Double Row Feed Dog and Double Toe Foot available separately.
- Extra large vertical and horizontal workspace, oscillating shuttle, hook and bobbin
- Belt guard
- Designed to sew Cordura and Dyneema material, up to 12,000 ppi webbing and can use up to size Tex 700 cord (thread).
- Comes with bobbin pin for pre-wound bobbins

SPECIFICATIONS 733R-8

Speed, Max. (S.P.M.)*	550	
Clearance Under Foot	40 mm	
Needle Bar Stroke	72 mm	
Stitch Length, Max.	15 mm	
Needle	6x3 size 330	
Bobbin	Metal	35226
	Pre-wound	41
Hook	35224	
Bed Size	10" x 26¼" (258 x 655 mm)	
Work Space	16¼" (413 mm)	
Stitch Type	301	
Weight	231 lbs. (105 kg.)	

* Speed depends on operation, materials and thread

- 733R-8 features improvements allowing for use of thicker thread and heavier materials
- 40 mm needle clearance under foot
 - More leverage on presser foot lifter for easier lifting
 - Now comes with bobbin spindle adapter

Plus modifications / improvements to

- Needle Plate
- Needle Bar Clamp
- Stitch Regulator Limiting Pins
- Center Foot
- Shuttle Driver

and other modifications aimed at smoother running with heavier threads and materials.




CLINTON INDUSTRIES


"SERVING THE SEWING INDUSTRY SINCE 1954"

Optionally available from Clinton Industries:
Automatic Footlift and Automatic Backtack


Note: This modification requires a compressed air source




Standard pedals that come with the machine have: a Foot Lift pedal that hooks to bar, a Treadle that goes direct to motor and a Reverse pedal that goes to a chain.

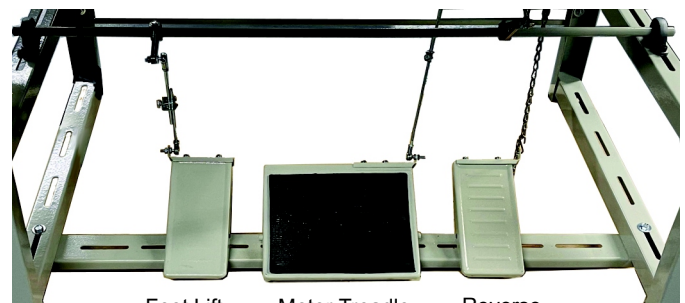

Optional Treadle System
with 3 controllers

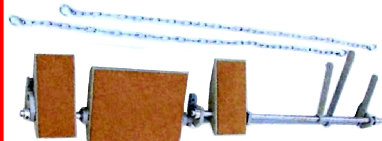

uses a "pipes" based
controlling method.

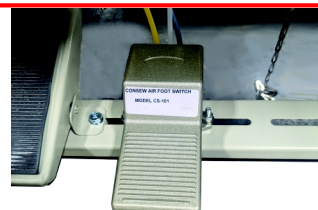

Optional Air pedal controller



Stitch Length Lever
with non-slip pin