



Since 1898
CONSEW®

Model 768RB-Series POSTBED MACHINES


768RB-7DD SINGLE NEEDLE

768RB-D-7DD DOUBLE NEEDLE

Comes in 220v only
110-220v converter option is available

HEAVY DUTY
WALKING FOOT
FULL FUNCTIONS PLUS
DROP FEED, NEEDLE FEED
AND ALTERNATING
PRESSER FEET
LOCKSTITCH MACHINES

768RB-D-7DD
Shown here
with optional
pneumatic
center guide foot

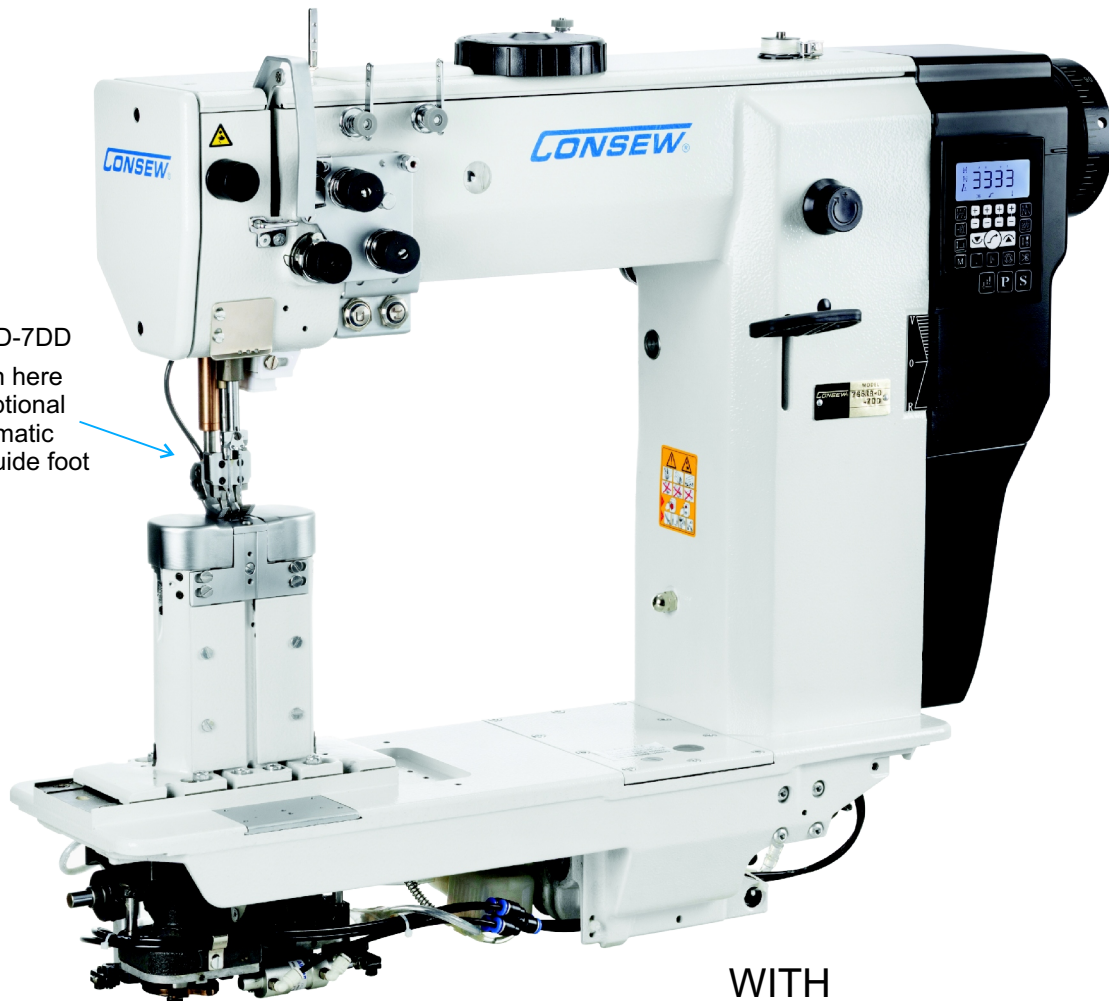

WITH
LARGE DROP-IN BOBBIN(S)
AUTO REVERSE FEED
AUTO FOOT LIFT
AUTO TREAD TRIM
NEEDLE POSITIONER


768RB-7DD and 768RB-D-7DD

APPLICATIONS

- For wide range of industries for all types of medium/heavy duty applications. Such as: Automotive, Upholstery, Marine, Tie-down and Sling, Harness, Parachute, Tents and Awnings, Apparel, Bedding, etc.

ADDITIONAL FEATURES

- Direct Drive
- Advanced oiling system
- 13.6" Arm length
- Presser foot clearance up to 16mm.
- High needle bar stroke
- Convenient one-button high step
- Full auto-functions including: Auto trimmer, auto reverse, auto footlift, climbing device, needle positioner, stitch counting, line tacking, and pattern stitching.
- External compressed air source required (40 - 50 psi)
- Bobbin winder built-in
- Adjustable parameter settings
- Convenient knuckle switches on arm: Reverse, and high step.
- Safety clutch
- Power: 220v single phase
- Automatic programmable beginning and ending Backtacking
- LED under lighting built in
- Hi-quality metal bearings for hi-speed and long production runs
- Available option: Pneumatic center guide foot.

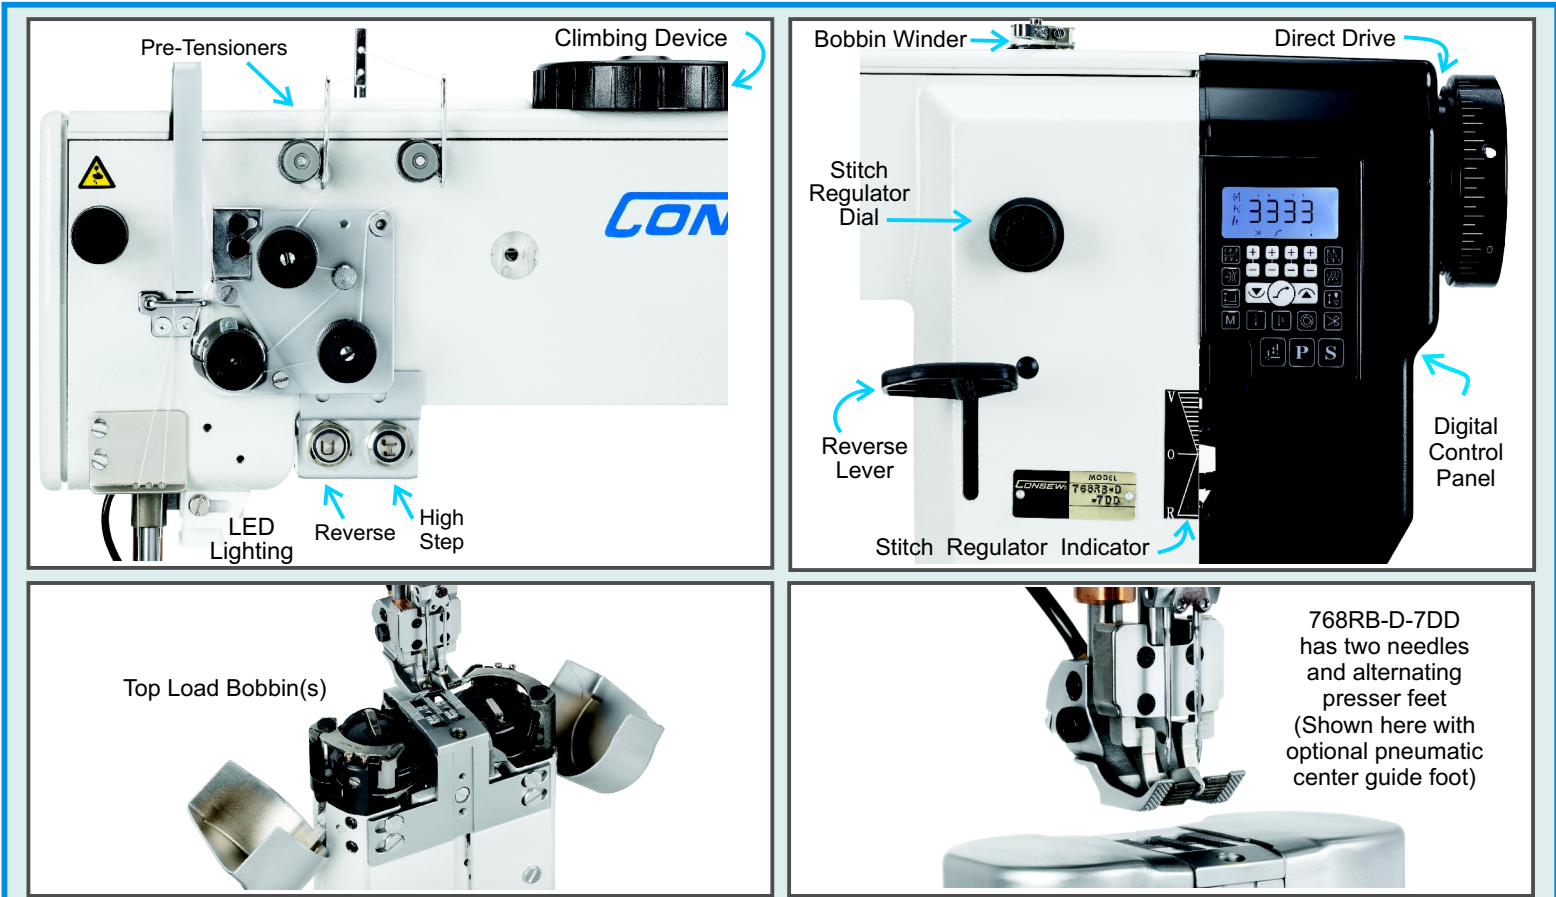

SPECIFICATIONS

Speed - s.p.m.	2200 spm*
Max. Stitch Length	9 mm
Manual Presser Foot Lift	8 mm
Pneumatic Foot Lift	16 mm maximum
Bobbins	26 mm (M)

Number of Needles	Single	Double
Needle System	134 -35	
Air Pressure Required	40 - 50 psi	
Workspace	345mm x 310mm	
Needle Gauges in MM	5, 6, 8, 10, 12, 14	

* Speed depends on thread, material and operation.