



# Models CM793/CM794/CM795

## HIGH SPEED OVERLOCK MACHINES

WITH  
FULLY AUTOMATIC LUBRICATION  
DIFFERENTIAL FEED  
PUSHBUTTON STITCH REGULATOR




**Model CM795** TWO NEEDLE — 5 THREAD  
For overlock sewing of medium to heavyweight materials with a safety stitch

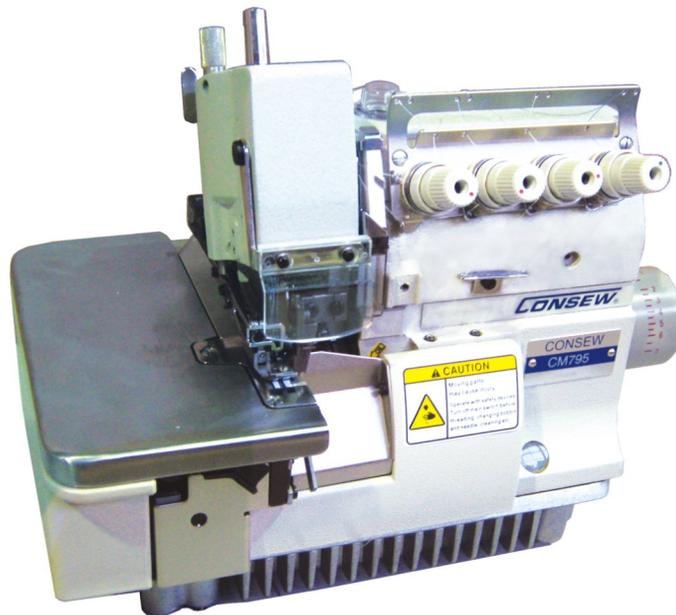

**Model CM793**  
SINGLE NEEDLE — 3 THREAD




For overlock sewing  
of light to  
heavyweight materials

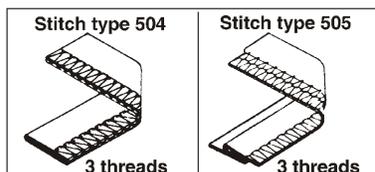

**Model CM794**  
TWO NEEDLE — 4 THREAD



For overlock sewing of medium  
to heavyweight materials




# Models CM793 / CM794 / CM795 HIGH SPEED OVERLOCK MACHINES


## APPLICATIONS

For overlock sewing of light to heavyweight materials


**Model CM793** for general overedging such as hemming sleeves on men's knit underwear, closing shoulder for T-shirt, overedging net lining for tricot slips, closing skirt panel, attaching bodice and yoke for tricot slips etc.

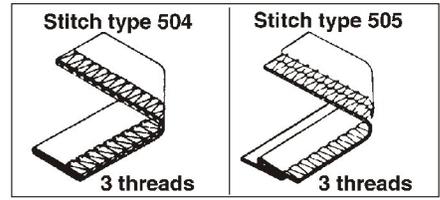

**Model CM794** - Mock Safety Stitch - suitable for seaming sides and joining front and side panels on ladies' swim suits and childrens' play pants; closing sides on ladies' panties; setting sleeves on ladies' uniform dresses and knitted sport shirts; sewing cuffs to sleeves and attaching pocket pieces to front and back on ladies' robes; setting body lining on men's raincoats, etc. Equipped to handle medium to heavy weight materials and designed for sewing stretchable materials or fabrics which need elasticity in stitching.



**Model CM795** - True Safety Stitch - suitable for sewing products such as men's, ladies' and children's wear, especially coats for children and women. Designed for general seaming on woven fabrics. Also suitable for edging vinyl, canvas and upholstery fabrics



## FEATURES

- Speed, Max. up to 7000 s.p.m. (See machine specifications below)
- Fully automatic lubrication with visual flow controls
- Lubricating oil continuously filtered by replaceable filter
- External cooling of oil supply

- Differential feed
- Push-button stitch regulator
- Intermittent action possible
- Standard type DC-27 needles
- Reduced noise and vibration when operating at high speeds

## AVAILABLE OPTIONS

ET: Electric thread trimmer

P3D: Pneumatic thread trimmer

C: Back tacking

## SPECIFICATIONS

Speed depends on operation, materials and thread

### Model CM793

Max. Sewing Speed: 7,000 S.P.M.  
 Presser Foot Lift: 5.5 mm  
 Differential Ratio: 1 : 0.7 ~ 1.7  
 Needles: 1  
 Overedging Width: 4 mm  
 Stitch Length, Max: 3.8 mm  
 Number of Threads: 3  
 Needle: DC x 27 size 11

### Model CM794

Max. Sewing Speed: 6,500 S.P.M.  
 Presser Foot Lift: 6 mm  
 Differential Ratio: 1 : 0.7 ~ 1.7  
 Needle Gauge (2): 2 mm standard  
 Overedging Width: 4 mm  
 Stitch Length, Max: 0.7 - 3.8 mm  
 Number of Threads: 4  
 Needle: DC x 27 size 11

### Model CM795

Max. Sewing Speed: 6,500 S.P.M.  
 Presser Foot Lift: 5.5 mm  
 Differential Ratio: 1 : 0.7 ~ 1.7  
 Needle Gauge (2): 2 mm standard  
 Overedging Width: 4 mm  
 Stitch Length, Max: 3.8 mm  
 Number of Threads: 4 / 5  
 Needle: DC x 27 size 14

Call for availability of other optional stitch patterns

