

# Model CM795EXT-H


## HIGH SPEED OVERLOCK MACHINE

TWO NEEDLE — 5 THREAD  
WITH  
FULLY AUTOMATIC LUBRICATION  
DIFFERENTIAL FEED  
PUSHBUTTON STITCH REGULATOR

OVERLOCK-COVERSTITCH



Stitch type 516



Note:  
CM795-1 has a 5th thread  
tensioner on the side

For overlock sewing of medium to heavyweight materials with a safety stitch


# Model CM795EXT-H HEAVY DUTY HIGH SPEED OVERLOCK MACHINE

## APPLICATIONS

For overlock sewing of light to heavyweight materials


**Model CM795EXT-H** - True Safety Stitch - suitable for sewing products such as men's, ladies' and children's wear, especially coats for children and women. Designed for general seaming on woven fabrics. Also suitable for edging vinyl, canvas and upholstery fabrics

Stitch type 516



5 threads

Closeup  
of  
Needles

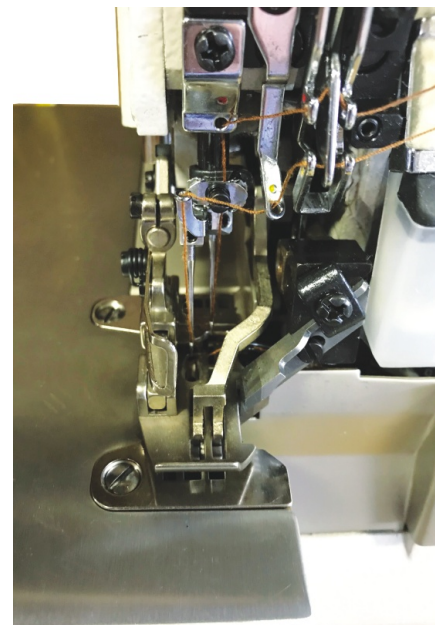

## FEATURES

- Speed, Max. up to 7000 s.p.m. (See machine specifications below)
- Fully automatic lubrication with visual flow controls
- Lubricating oil continuously filtered by replaceable filter
- External cooling of oil supply

- Differential feed
- Push-button stitch regulator
- Intermittent action possible
- Standard type DC-27 needles
- Reduced noise and vibration when operating at high speeds

## AVAILABLE OPTIONS

**ET:** Electric thread trimmer

**P3D:** Pneumatic thread trimmer

**C:** Back tacking

## SPECIFICATIONS

|                     |                 |
|---------------------|-----------------|
| Max. Sewing Speed:  | 6,500 S.P.M.    |
| Presser Foot Lift:  | 5.5 mm          |
| Differential Ratio: | 1 : 0.7 ~1.7    |
| Needle Gauge (2):   | 2 mm standard   |
| Overedging Width:   | 4 mm            |
| Stitch Length, Max: | 3.8 mm          |
| Number of Threads:  | 4 / 5           |
| Needle:             | DC x 27 size 14 |



Detail of CM795 showing  
convenient swing-out  
presser foot assembly



**CLINTON INDUSTRIES**  
SERVING THE SEWING INDUSTRY SINCE 1954

Optional Automation Upgrades  
available from Clinton Industries:

- Waste Collection System
- Tape Cutting Device
- Thread Trimmers

Call for availability of other optional stitch patterns

