NEW!

PREMIER® CONSEW® Since 1898

P1199RB-7DD-DSM-10

10 PRE-PROGRAMMED PATTERNS

Comes in 220V only

Optional 110V/220V converter can be purchased separately

WITH

- DIRECT DRIVE BUILT-IN SERVO MOTOR
- FULL FUNCTION:
  - Needle Position (Stop-Up /Stop-Down)
  - Auto foot lift (electric) • Auto reverse (electric)
  - Auto Thread trimmer (electric) • Stitch counting
- REVERSE
- VARIABLE SPEED CONTROL
- LARGE FRONT LOAD BOBBIN (Style M)

Built-in Bobin Winder

Digital Control Panel


AUTOMATIC FUNCTIONS

DIRECT DRIVE

LARGE BOBBIN



Zig-Zag Machine with Easy to Switch Decorative Stitch Patterns

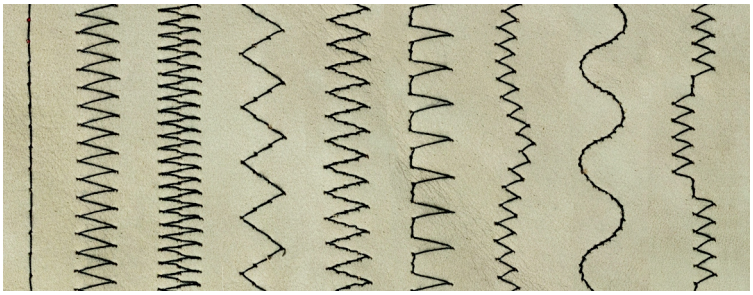

SINGLE NEEDLE
DROP FEED
Decorative Stitch
LOCKSTITCH MACHINE
Direct Drive

PREMIER CONSEW®

Model P1199RB-7DD-DSM-10

APPLICATIONS

- For sewing light to medium heavy weight fabrics including clothing, shoes and caps, leather articles, bags and more
- For attaching lace, bottom hemming, edge stitching, butted seaming, applique and similar operations
- Decorative seaming on thin, medium and thick fabrics. For bras, underwear, gloves ,garments, pants, shirts, skirts, shoes, caps, leather, bags, parachute lines, canopies, etc.

FEATURES

- Drop Feed
- Patented Automatic Lubrication
- Horizontal axis rotary hook (front-load)
- Electronic zig-zag adjustments
- Electronically controlled stitch type
- Includes the 304 and 308 Stitch patterns
- Reverse stitching
- Metal gears (hardened steel)
- Hook is coated with DLC for extra smooth operation
- Style M pre-wound bobbins
- New wear resistant feed dog holder
- Improved linkage mechanism for longer life
- Stepper motor footlift
- Built-in control panel
- Built-in bobbin winder
- Direct Drive (DD) Internal Motor

Full Function:


- Needle Position *(Stop-Up / Stop-Down)*
- Auto foot lift *(electric)*
- Auto reverse *(electric)*
- Thread trimmer *(electric)*
- Stitch counting

- Optional piping feet available


Easily switch between Pre-Programmed patterns via digital control panel




Built-in Bobbin Winder

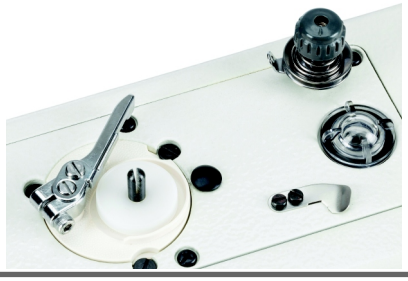

Oil Level Viewing Glass



Built-in LED Lighting

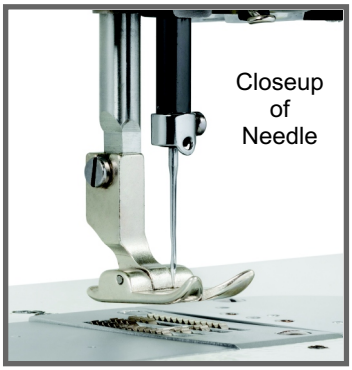

Closeup of Needle

SPECIFICATIONS

Speed, Max. (S.P.M.) ∗		2000
Clearance Under Foot	by hand by knee	6 mm 12 mm
Stitch Length, Max.		4 mm
Needle		135 x 7
Work Space		266 mm (10.47")
Stitch Width Max.		9 mm (0.354")
Stitch Type		Zig Zag, Straight and Decorative
Power		*750 w* / 220 vac single phase motor

Optional 110V/220V converter can be purchased separately.

∗ Speed depends on width of zig-zag, material and thread.

e DPX8

©2026 Consew USA -0926