



TWO NEEDLE

Designed for automotive, marine, leather, canvas and general upholstery.

P1560RB-14 / P1560RBL-18 / P1560RBL-25 14" 18" 25"

Plain Machine - Motor, Stand, Table needed.

with

- Large Top Load Bobbin
- Vertical Access Hook
- Built-in Bobbin Winder
- Walking Foot

- Climbing Device
- Reverse
- Semi-Automatic Oiling



SPECIFICATIONS

Speed, maximum: 2000 - 2500 spm *

Needle: 135 x 17 (DPX17)

1/4" gauge, Largest gauge for regular machines is 1-3/4" Stitch Length; Max. 9mm Adjustment By Dial Presser Foot Lift By Hand: 9 mm By Knee: 16mm

Lubrication: Semi-Automatic Power: 110 or 220 v. 1-Phase

 $\ensuremath{\bigstar}$ Speed depends on thread, material and operation.


Two Needle
Walking Foot
Lockstitch Machines



CONSEV® Models P1560RB series

TWO NEEDLE

Designed for automotive, marine, leather, canvas and general upholstery.

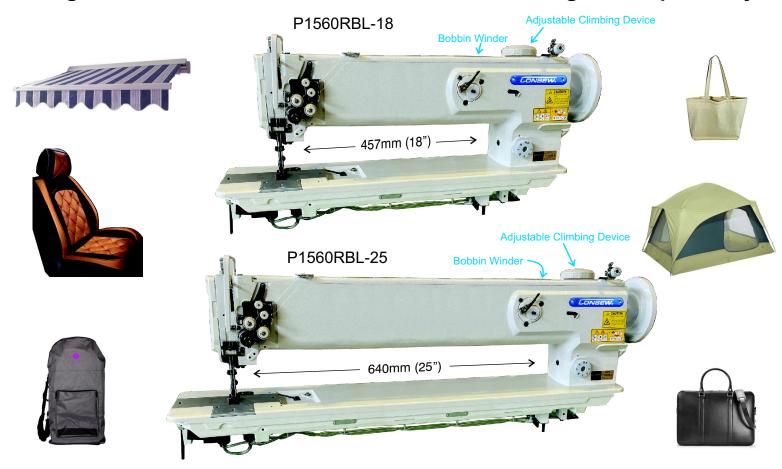


Don't forget to order the appropriate size Table/Stand/Motor for these standard powered machines. Complete Stand with K-Legs available separately.

Optional for the P1510RB, P1560RB & 1565RB series plain belt-driven machines.

Automatic Footlift Kit (complete) part# 285A1510

To be used with Consew motors CSM3002 and CSM4002





Single Electric Air Switch Solenoid Valve

> Air Regulator with Drver