



**DIRECT DRIVE
LARGE WORKSPACE**

CONSEW Since 1898

Model P1565RB-DD and -7DD series

TWO NEEDLE with SPLIT NEEDLE BAR

Designed for automotive, marine, leather, canvas and general upholstery.

The Automatic Footlift and Reverse on these machines operates Pneumatically (Air) and require a compressed air source (not supplied by Consew.)

Automatic Function Machines (-DD)

The (-DD) does NOT have the Automatic Thread Trim

P1565RB-14-DD/220 14"

P1565RBL-18-DD/220 18"

P1565RBL-25-DD/220 25"

Currently Available in 220V 1-phase Version ONLY.

Full Automatic Function Machines (-7DD)


The (-7DD) has Automatic Thread Trim

P1565RB-14-7DD/220 14"

P1565RBL-18-7DD/220 18"

P1565RBL-25-7DD/220 25"


Currently Available in 220V 1-phase Version ONLY.

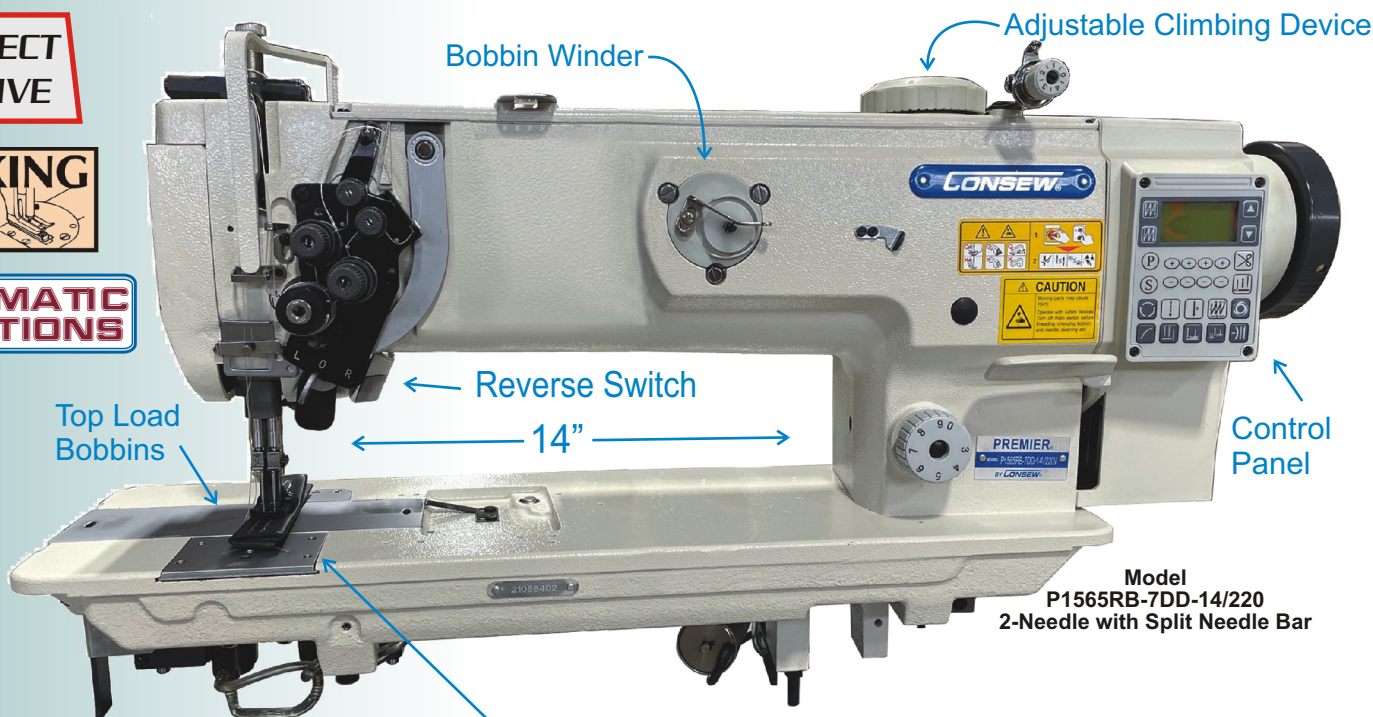

Model
P1565RB-7DD-14/220
2-Needle with Split Needle Bar

WALKING FOOT
Double Needle
Split Needle Bar

ANGULAR STITCHING



P1565RBL-25-DD/220



P1565RBL-18-DD/220



Automatic
Functions
High Speed
Direct Drive
(Servo Motor connected to Top Shaft)
Two Needle
with Split Needle Bar
Walking Foot
Lockstitch Machines

FLAT BED

Automatic Function Machines (-DD) No Auto Thread Trim

P1565RB-14-DD/220 14" workspace

P1565RBL-18-DD/220 18"

P1565RBL-25-DD/220 25"

Full Automatic Function Machines (-7DD with Auto Thread Trim)

P1565RB-14-7DD/220 14" workspace

P1565RBL-18-7DD/220 18"

P1565RBL-25-7DD/220 25"

APPLICATIONS

- For sewing light to heavy-weight fabric, canvas, leather, vinyl, synthetics and various laminated and coated materials
- Designed for stitching such products as auto, boat and furniture upholstery, tarpaulins, covers, awnings, tents, umbrellas, handbags, luggage, travelware accessories, sports and camping equipment, wearing apparel, outdoor clothing, footwear, foundation garments, orthopedic appliances, etc.

Features for -7DD

- Large Top Load Bobbins
- Split Needle Bar (Angular Stitching)
- Built-in Bobbin Winder
- Walking Foot
- Climbing Device
- Roll-In, tucks the top thread under fabric when it starts
- Automatic Foot Lift
- Automatic Reverse
- Convenient push-button control switches
- Automatic Thread Trim (on -7DD only)

Features for -DD

- Same as -7DD except it does NOT have the Automatic Thread Trim or the Roll-in/Tuck feature.



Control Panel



Thread Trimmer Knife

SPECIFICATIONS


P1565RB-7DD and -DD series

Speed, Max. (S.P.M.)	* 2500 - 3000*
Clearance Under Foot	9/16" (14mm)
Presser Foot Lift	By Hand: (9 mm)
	By Knee: (16 mm)
Stitch Length, Max.	Max. 9mm adjustment by dial
Needle	135 x 17
Bobbin - Pre-wound	U or S
Work Space	14"(355 mm), 18"(457 mm)
	25"(635 mm)
Stitch Type	301
Needle Gauges	1/4" to 1"
	(Custom gauges also available)


* Speed depends on thread, material and operation.

P1565RB-14-7DD/220V

This is a fully automatic machine, and includes the air cylinders for the **footlift, reverse feed, and trim** functions.

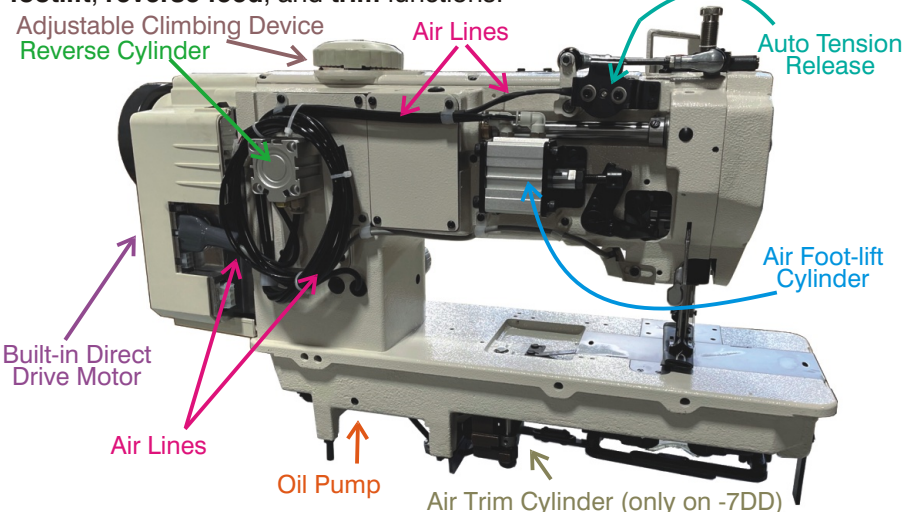

Available Option: Adjustable, spring-loaded, retractable, SWING ARM GUIDE.




THREAD TRIMMER ON -7DD



Thread Trimmer Solenoid


SPLIT NEEDLE BAR FOR ANGULAR STITCHING

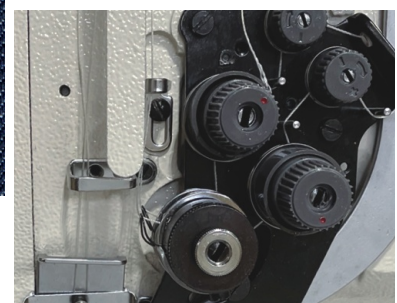

NEEDLE SELECT LEFT, CENTER, RIGHT



TWO NEEDLE WALKING FEET SPLIT NEEDLE BAR

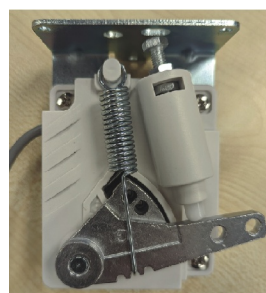

Treadle control lever.

This is plugged in to the motor's electronics and is connected to the foot treadle with the treadle rods

Currently Available in 220v 1-phase Version ONLY.