



LARGE WORKSPACE



CONSEW Since 1898

Models P1565RB series

TWO NEEDLE with SPLIT NEEDLE BAR


Designed for automotive, marine, leather, canvas and general upholstery.

P1565RB-14 / P1565RBL-18 / P1565RBL-25
14" 18" 25"

Plain Machine - Motor, Stand, Table needed.

with

- Split Needle Bar for Angular Stitching
- Large Top Load Bobbins
- Built-in Bobbin Winder
- Semi-Automatic Oiling
- Walking Foot
- Climbing Device
- Reverse



WALKING FOOT

**Double Needle
Split Needle Bar**

ANGULAR STITCHING

High Speed
Two Needle
with Split Needle Bar
Walking Foot
Lockstitch
Machines

FLAT BED

P1565RB-14 / P1565RBL-18 / P1565RBL-25

14" 18" 25"

TWO NEEDLE with SPLIT NEEDLE BAR

Designed for automotive, marine, leather, canvas and general upholstery.

SPECIFICATIONS

Speed, maximum: 2500 - 3000 spm *

Stitch Length; Max. 9mm Adjustable

Presser Foot Lift: Hand- 9 mm
Knee- 16mm

Needle: 135 x 17

Bobbin: U or S


Work Space: 14"(355 mm)
18"(457 mm)
25"(635 mm)

Lubrication: Semi-Automatic


Needle Gauges: 1/4" to 1"
(Custom gauges also available)

Power: 110 or 220 v. 1-Phase

* Speed depends on thread, material and operation.



SPLIT NEEDLE BAR

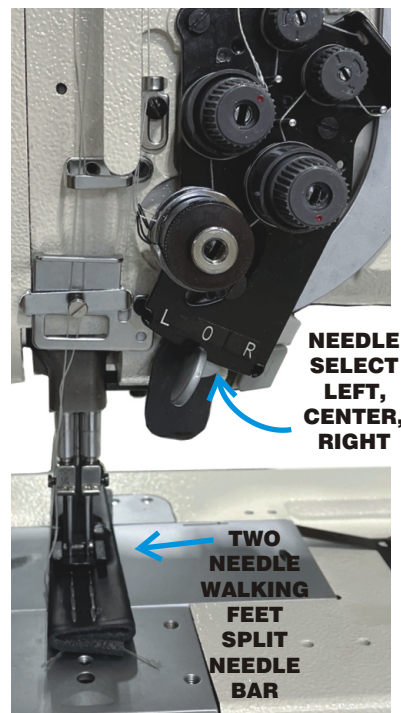


Optional for the P1510RB, P1560RB & 1565RB series plain belt-driven machines.

Available Option:
Adjustable,
spring-loaded,
retractable,
SWING ARM GUIDE.



Automatic Footlift Kit (complete) part# 285A1510
To be used with Consew motors CSM3002 and CSM4002

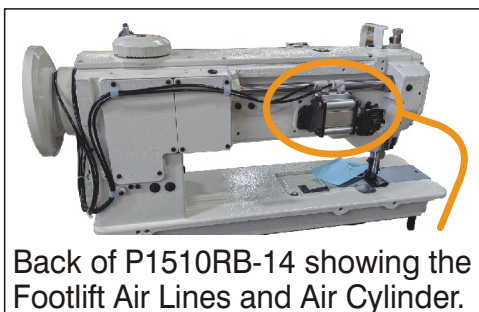

Single solenoid setup includes...
FootLift Air Cylinder



285A1510



Single Electric Air Switch Solenoid Valve

Air Regulator with Dryer