


Since 1898  
**CONSEW**®



# MODELS 333RB-3 / 333RBL-25

**TWO NEEDLE**


WITH  
CENTRA-LUBE® SEMI-AUTOMATIC LUBRICATION SYSTEM  
LARGE VERTICAL AXIS HOOKS AND BOBBINS  
REVERSE FEED - MODELS 333RB-3/333RBL-3  
SAFETY CLUTCH

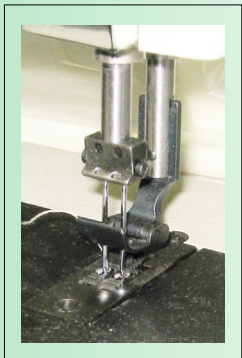

**DOUBLE NEEDLE**

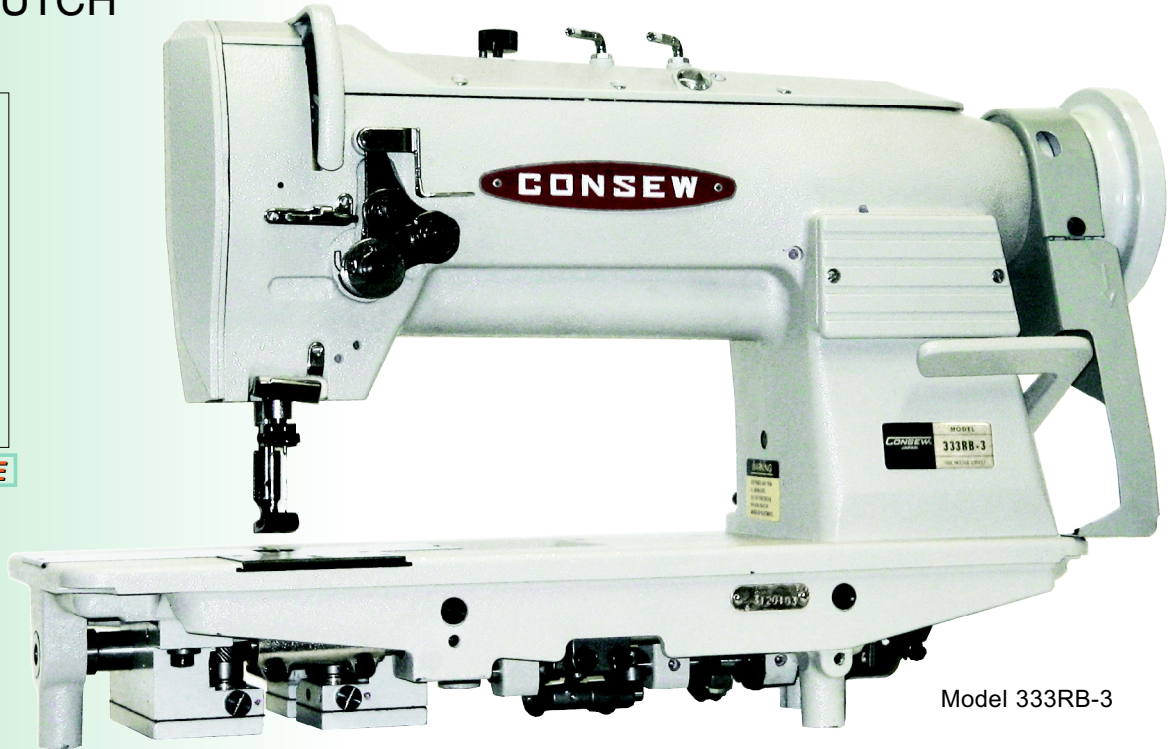

Model 333RB-3

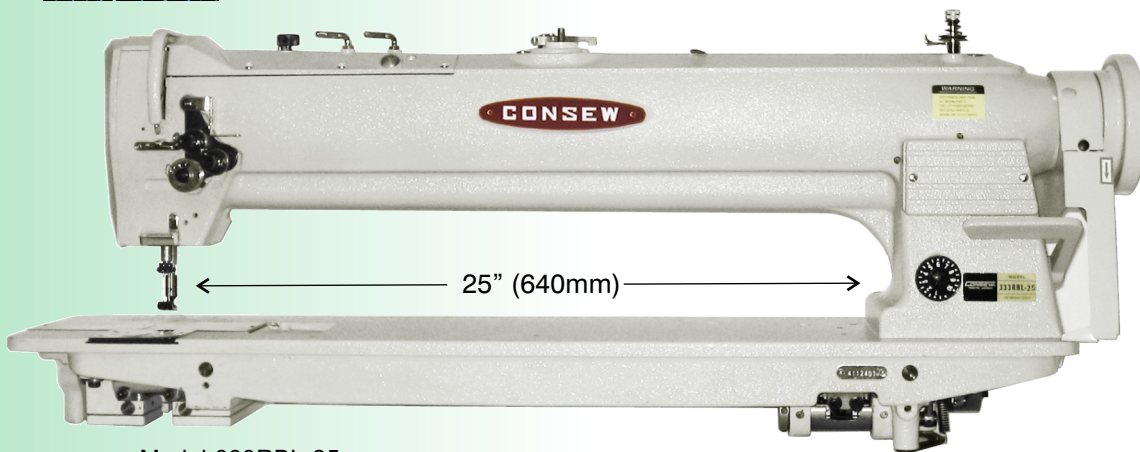

Model 333RBL-25

**HIGH SPEED, TWO NEEDLE  
DROP FEED, NEEDLE FEED  
LOCKSTITCH MACHINE**

Also available: 333B large bobbin - no reverse

## Models 333RB-3 / 333RBL-25

### APPLICATIONS

- Designed for stitching medium to medium-heavy weight fabrics, leather, canvas, vinyl, synthetics and various laminated and coated materials
- Suitable for sewing auto, boat and furniture upholstery, boat covers, sails, awnings, tents, light tarpaulins, camping equipment, cot and beach chair covers, slip covers, draperies, mattress binding, luggage, travelware accessories, wearing apparel, coats, work clothes, foundation garments, etc.
- Designed for stitching reinforced and parallel stitches
- Suitable for such operations as attaching zippers, lap seam felling, staying shoe linings, and general double needle seaming, binding, taping and piping

### FEATURES

- Large vertical axis hooks and bobbins assures longer operation between bobbin changes
- The compound feed mechanism assures perfect and uniform stitching and eliminates slippage
- Centra-Lube® semi-automatic lubrication system
- Automatic hook lubrication
- Oil fed take-up
- Reverse stitching - Models 333RB-3 /333RBL-25
- Large range of gauge sets available
- Safety clutch prevents the hooks from being damaged
- Synchronized puller available (add suffix -P)

**333RB-3** – Large hooks and bobbins and reverse feed  
**333RBL-25** – Large hooks and bobbins, reverse feed and LONG ARM




### SPECIFICATIONS

Speed, Max. (S.P.M.) *	333RB-3	2800
	333RBL-25	2200
Clearance Under Foot		2 1/64" (8.5mm)
Needle Bar Stroke		1-5/16" (33 mm)
Stitch Length, Max.		4 s.p.i. (6.5 mm)
Needle		135 x 17
Bobbin	Metal	15041
	Pre-wound	S or U


\* Speed depends on operation, material and thread

Hook		15502
Bed Size	333RB-3	7" x 20-3/8" (177 x 518 mm)
	333RBL-25	7" x 28-1/4" (177 x 718 mm)
Work Space	333RB-3	10" (254mm)
	333RBL-25	25" (640 mm)
Standard Needle Spacing		1/4" (6.4 mm)
Available Needle Spacings		1/16" (1.6mm) – 1-1/2" (38.1mm)
Stitch Type		301


Available Option: Adjustable, spring-loaded, retractable, SWING ARM GUIDE.  
 (Works on both 1 or 2 needle machines.)

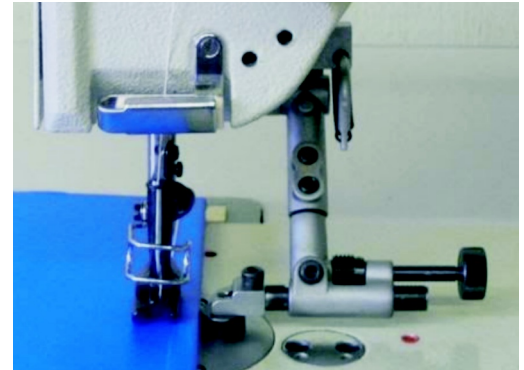

Optionally available from Clinton Industries:  
 Automatic Footlift and Automatic Backtack

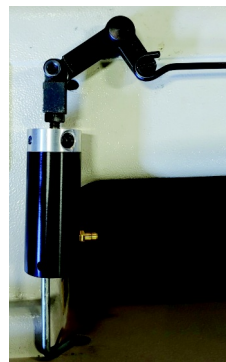

Footlift for RB

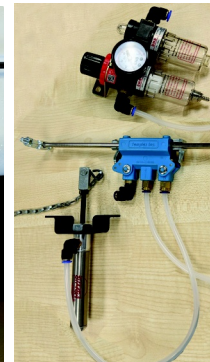

Footlift for RBL



Backtack