


CONSEW Since 1898

Model 366-30P LONG ARM ZIG-ZAG MACHINE with PULLER

Also available: 366-30 without Puller

With

- LARGE TRANSVERSE SHUTTLE HOOK AND BOBBIN
- BOBBIN WINDER ON FRONT OF MACHINE
- PRESSER FOOT LIFT UP TO 20 MM
- UP TO 12 MM ZIG-ZAG

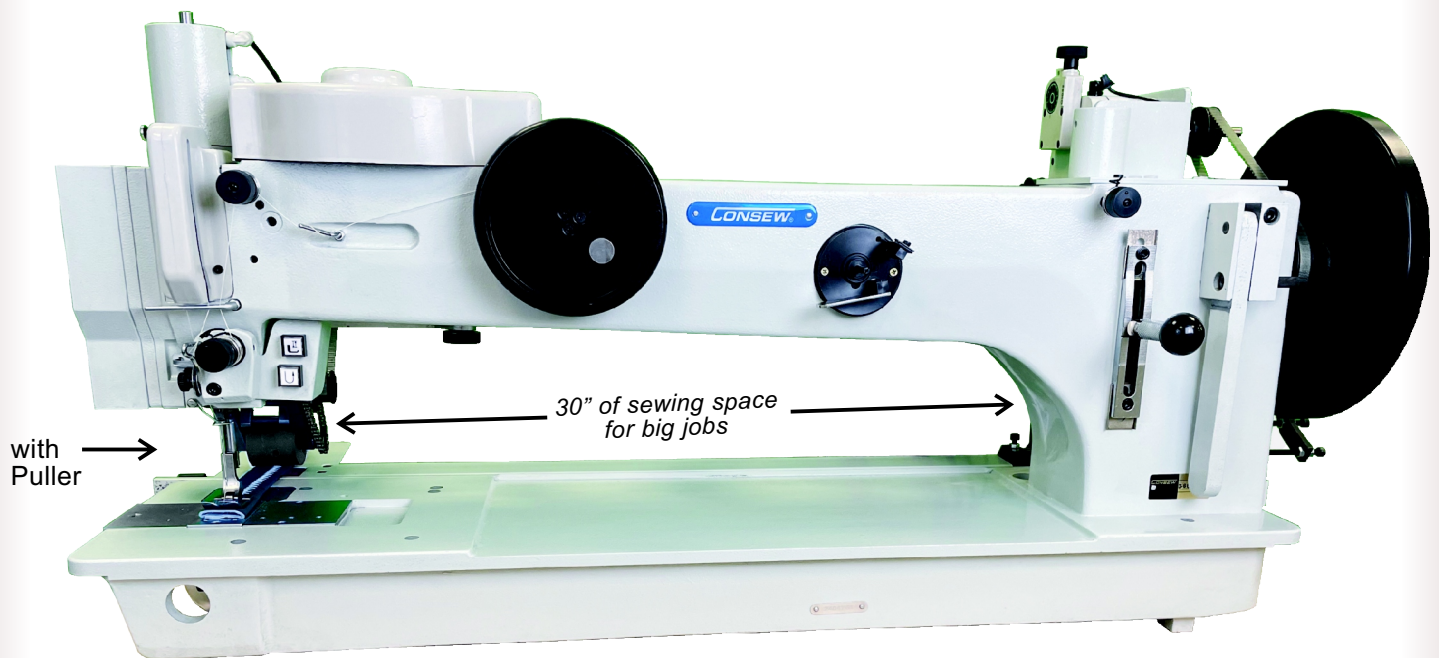

**HEAVY DUTY, SINGLE NEEDLE
STRAIGHT STITCH and *ZIG-ZAG*
LONG-ARM MACHINE**

Model 366-30P

APPLICATIONS

- Great for sewing various kinds of sail cloth, synthetic, vinyl, canvas and working on large pieces. The zig-zag operation is particularly suited for the production of sails, tents, tarpaulins & leather goods




FEATURES

- Straight Stitch up to 10mm stitch length
- Zig-Zag: 1-step, 2-step & 3-step operation
- With Puller Feed
- Control cams for 1-step, 2-step and 3-step zig-zag included
- Fast conversion to different stitches and needle sizes
Stitch control cams, hook, bobbin and shuttle race can be easily accessed by loosening a knurled nut
- Large transverse shuttle hook and bobbin
- Bobbin winder is on the front of the machine
- Presser foot lift up to 20 mm
- Large handwheel for increased sew-through capability
- Coordinated foot pressure and foot lift for easy control
- Push-button control for intermittent tacking
- Comes with an air foot lift and air reverse.
(Compressed air source is necessary for these features)
- Foot lift button *(requires full function motor)*
- Reverse button

Bobbin winder on the front of the machine



Powerful Puller Feed for heavy duty items

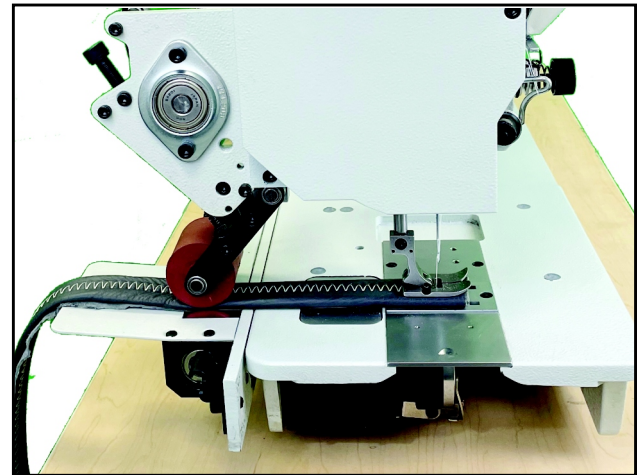

SPECIFICATIONS

Max. sewing speed	600 r.p.m *
Max. stitch length	10 mm
Zigzag stitch width	0-12 mm
Needle bar stroke	50.8 mm
Thread take-up stroke	96 mm
Presser Foot Lift Height	By hand 13 mm
	By knee 20 mm
Needle size	DY x 3 25#
Shuttle hook	KSP-204N
Lubrication	Manual
Working space	760 x 175 mm

** Speed depends on materials, thread and operation.*

Back View of 366-30P

