


## PREMIER® P1255RBLH-18-1

**Drop Feed, Needle Feed, Walking Foot Lockstitch Machine** with up to 6" vertical working space

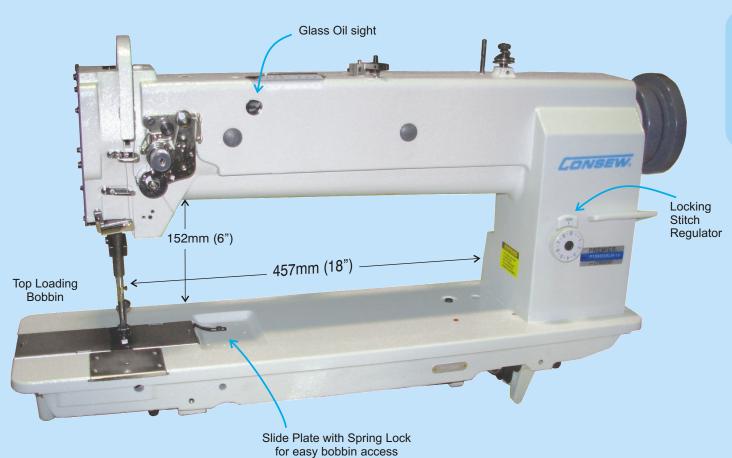

- Long Arm with 18" working space and up to 6" vertical space
- Large Vertical Axis Automatically Oiled Hook
- Oil Pump System with Adjustable Oil Flow
- Upper Oil Glass Sight
- Barrel-type, Locking Stitch Regulator
- Reverse
- Large Top-Loaded Bobbin(s)
- Safety Clutch
- Locking Slide Plate for easy bobbin access.
- Adjustable Take-Up Thread Guide for thread loop timing
- Quick Tension Release

SPECIFICATIONS		
Speed, Max. (S.P.M.)		1800*
Presser Foot Lift	By Hand	<sup>5</sup> / <sub>16</sub> " (8 mm)
	By Knee	<sup>33</sup> / <sub>64</sub> " (13 mm)
Needle Bar Stroke		1- <sup>27</sup> / <sub>64</sub> " (36 mm)
Stitch Length, Max.		2.8 s.p.i. (9 mm)
Needle		135 x 17
Hook		Large auto-lubricating hook
Work Space		18" x 5- <sup>29</sup> / <sub>32</sub> " (457 x 150 mm)
Working Height Under Arm		6" (152 mm) maximum
Stitch Type		301
Pre-wound Bobbin		U or S

©2021 Consew USA -0921

<sup>\*</sup> Speed depends on thread, material and operation.