



Since 1898
CONSEW[®]

Models 268RB series

HEAVY DUTY
POST BED
WALKING FOOT:
DROP FEED, NEEDLE FEED AND
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINES

268RB SINGLE
NEEDLE

268RB-D DOUBLE
NEEDLE



268RB-D
DOUBLE
NEEDLE



268RB
SINGLE
NEEDLE

WITH
LARGE DROP-IN BOBBIN(S)
REVERSE FEED
SAFETY CLUTCH



268RB / 268RB-D

APPLICATIONS

- For sewing medium to heavy-weight fabric, canvas, leather, vinyl, synthetics and various laminated and coated materials
- Designed for stitching such products as auto, boat and furniture upholstery, tarpaulins, covers, awnings, tents, umbrellas, handbags, luggage, travelware accessories, sports and camping equipment, wearing apparel, outdoor clothing, footwear, foundation garments, orthopedic appliances, etc.
- Suitable for stitching uneven, hollow, tubular and curved articles

ADDITIONAL FEATURES

- Postbed
- Compound feed, walking foot mechanism assures uniform stitching
- Presser foot step adjustment for climbing over seams
- Stitch length adjustment located on reverse lever
- Safety clutch prevents the hook from being damaged
- Safety-type handwheel belt guard
- Built-in bobbin winder
- All sizes of cording feet available
- Standard attachments easily installed

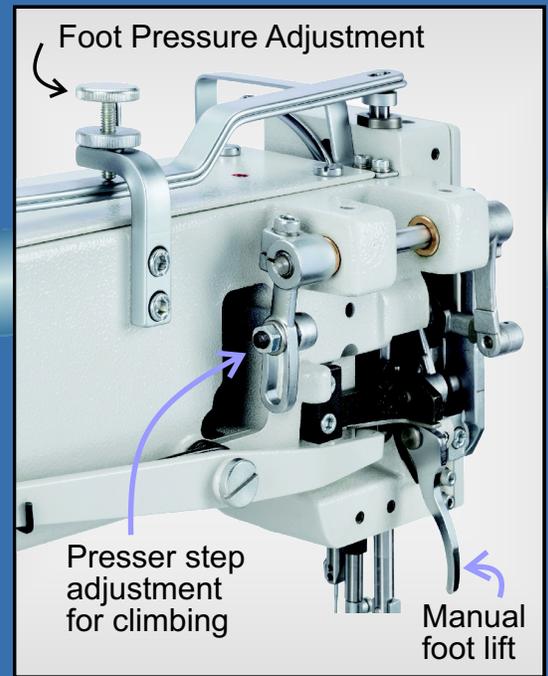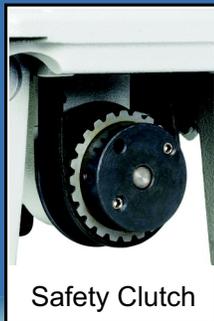

SPECIFICATIONS

	268RB	268RB-D
Speed, Max. (S.P.M.) *	2000 *	2000 *
Clearance Under Foot	6 mm Hand / 10 mm Foot	6 mm Hand / 10 mm Foot
Number of Needles	1	2
Stitch Length, Max.	4.2 s.p.i. 6 mm	4.2 s.p.i. 6 mm
NeedleSystem	134-35	134-35
Bobbin Pre-wound	M	M
Post Height	6.7" 170 mm	6.7" 170 mm
Stitch Type	301	301
Needle Gauges Available	—	6 mm to 20 mm



* Speed depends on operation, material and thread.