

Since 1898
CONSEW®


PREMIER® P2339RBLH-18

DOUBLE NEEDLE

**Drop Feed, Needle Feed, Walking Foot
Lockstitch Machine
with up to 6" vertical
working space**

FLAT BED

PREMIER®

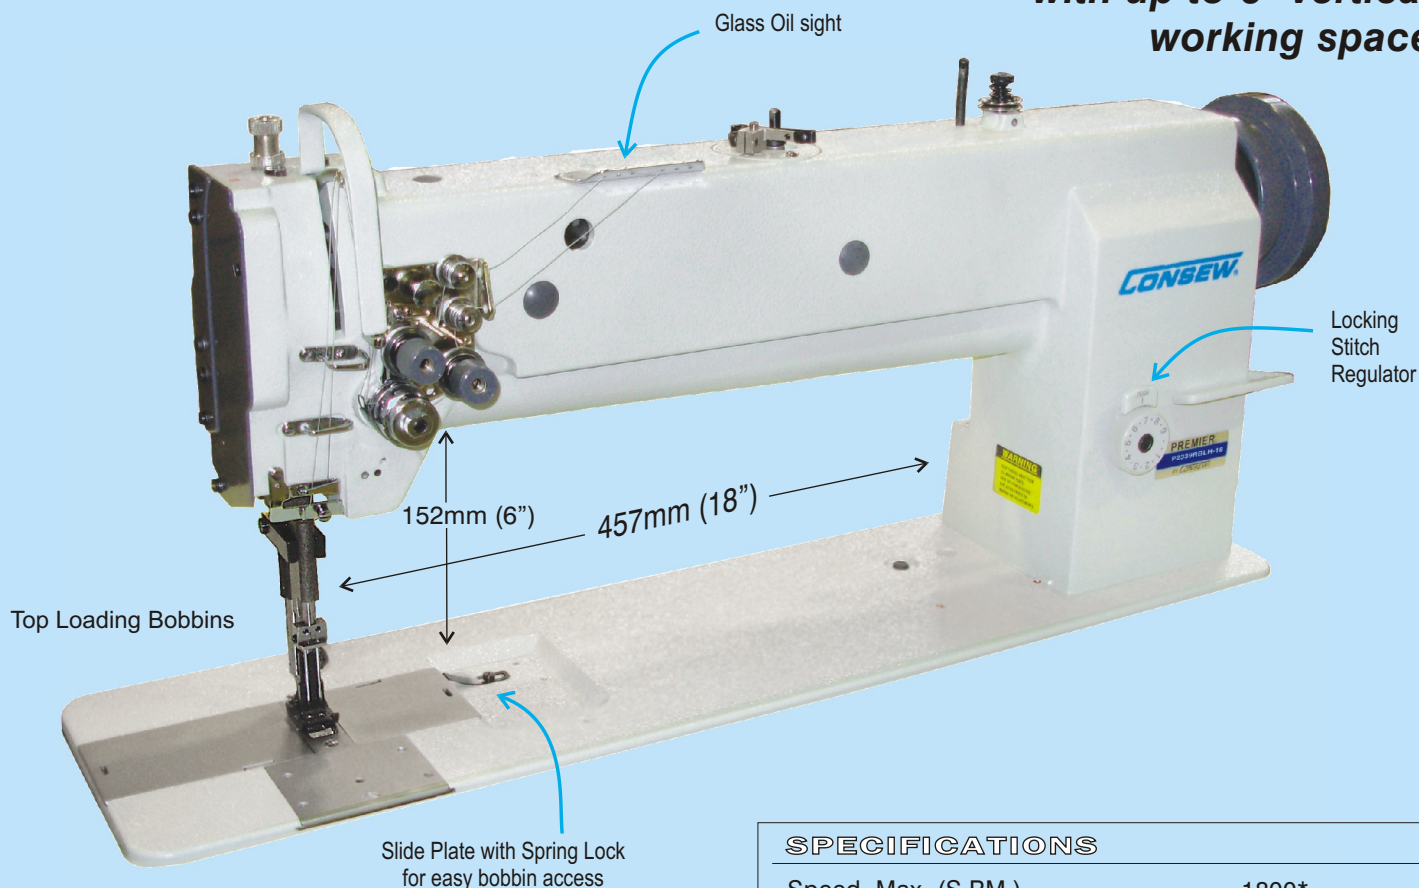

- Double Needle
- Long Arm with 18" working space and up to 6" vertical space
- Large Vertical Axis Automatically Oiled Hook
- Oil Pump System with Adjustable Oil Flow
- Upper Oil Glass Sight
- Barrel-type, Locking Stitch Regulator
- Reverse
- Large Top-Loaded Bobbin(s)
- Safety Clutch
- Locking Slide Plate for easy bobbin access.
- Adjustable Take-Up Thread Guide for thread loop timing
- Quick Tension Release

SPECIFICATIONS

Speed, Max. (S.P.M.)	1800*	
Presser Foot Lift	By Hand	5/16" (8 mm)
	By Knee	33/64" (13 mm)
Needle Bar Stroke	1-27/64" (36 mm)	
Stitch Length, Max.	2.8 s.p.i. (9 mm)	
Needle **	135 x 17	
Hook	Large auto-lubricating hook	
Work Space	18" x 5-29/32" (457 x 150 mm)	
Working Height Under Arm	6" (152 mm) maximum	
Stitch Type	301	

* Speed depends on thread, material and operation.

** Many twin needle gauge options available



CLINTON INDUSTRIES
"SERVING THE SEWING INDUSTRY SINCE 1954"

Footlift and Backtack Automation available as options from Clinton Industries.