



BLINDSTITCH



SKIP STITCH



NON-SKIP STITCH




Model CM-101-7DD
with Electronic Auto-Thread Trimmer
& Fabric Release

ALSO AVAILABLE:



Model CM-101-DD
with Direct Drive built-in motor


Model CM-101-1
Pulley Drive
Blindstitch Machine

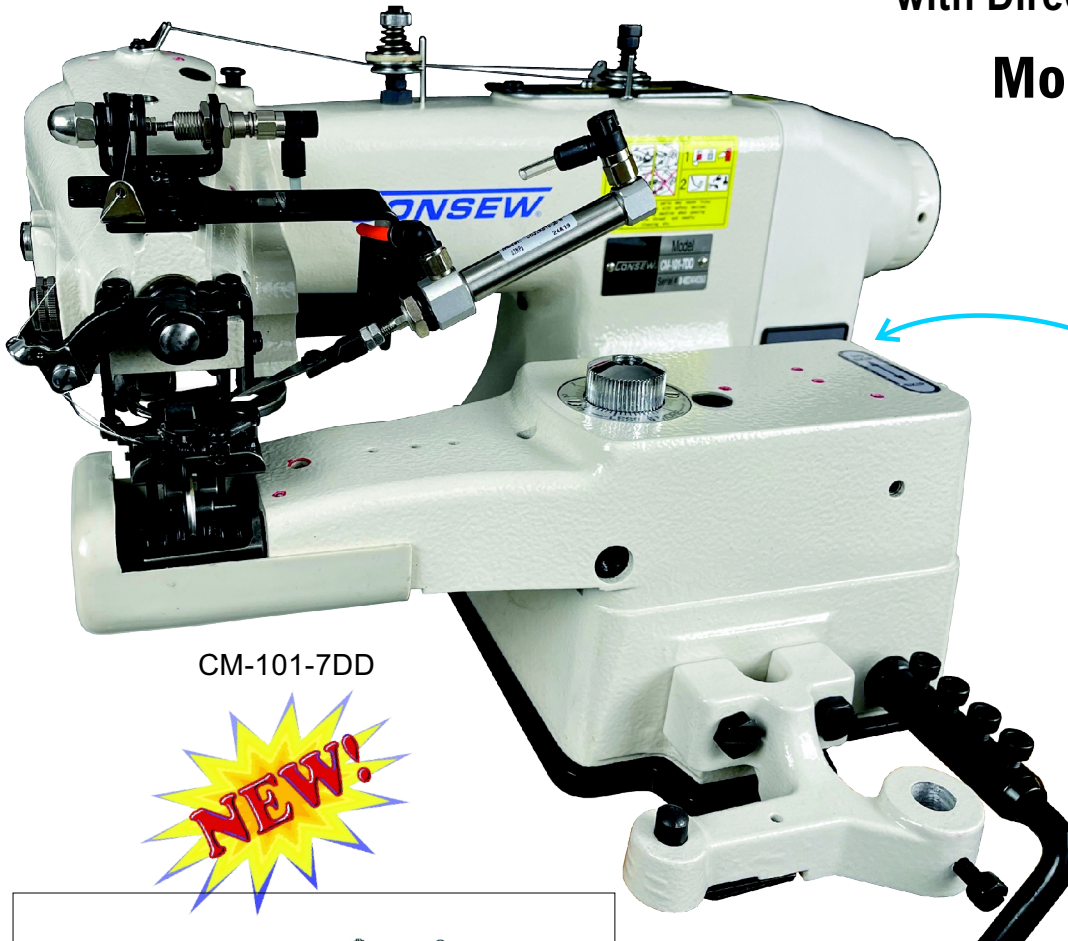

CM-101-7DD



Digital Control Panel

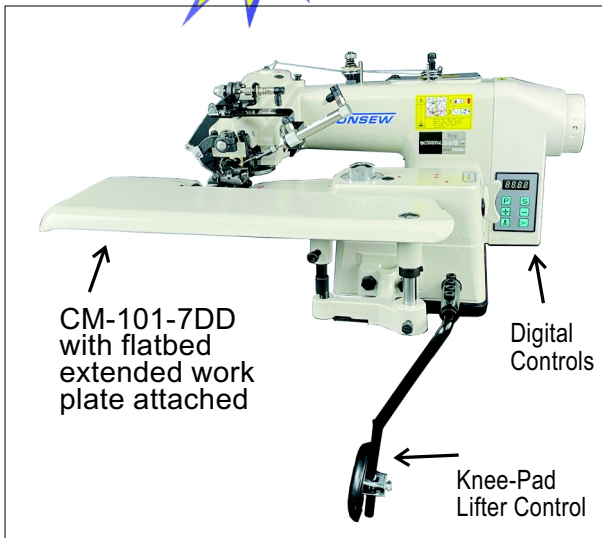

CM-101-7DD
with flatbed
extended work
plate attached

Digital
Controls

Knee-Pad
Lifter Control

SINGLE THREAD DIRECT DRIVE CHAINSTITCH BLINDSTITCH MACHINES

CM-101-7DD / CM-101-DD / CM-101-1

APPLICATIONS

Perfect for sewing all weights of materials including synthetics, woolens, cottons, fabrics and knits. Used for hemming cuffs, shirts, pants, suits, gloves, socks, etc.

1 to 1 non-skip stitches, typical operations include felling edge tapes, bottoms of trousers, cuffs, wiggling in sleeves, facings to canvas and knit goods, turned-up bottoms of fully lined coats, padding collars and lapels, and reinforcing trouser seats

2 to 1 skip stitch for hemming dresses, skirts, slacks, trousers, sportswear, ladies coats, draperies, blouses and other articles

Suitable for felling operations requiring a skip stitch to simulate hand-stitching


2 to 1 skip stitch is recommended for synthetics and other light-weight materials and **1 to 1 non-skip** stitch for heavier cotton, woolen and linen goods

FEATURES

- Internal Direct Drive Motor (-DD and -7DD)
- Digital Control Panel
- Skip and non-skip stitch lever
- Adjustable thread tension
- 1 to 1 non-skip stitch and 2 to 1 skip stitch
- Stitch depth penetration and stitch length adjustment dials
- Swing-away work plate for extended working space
- Knee-operated feed plate lowers for insertion and removal of work piece

Model CM-101-7DD has:

- Electronic Auto-Thread Trimmer & Fabric Release mechanism.
- Pneumatic Thread Trimmer, Dual Tension Release
- Feed-Dog Drop (to release thread & material)

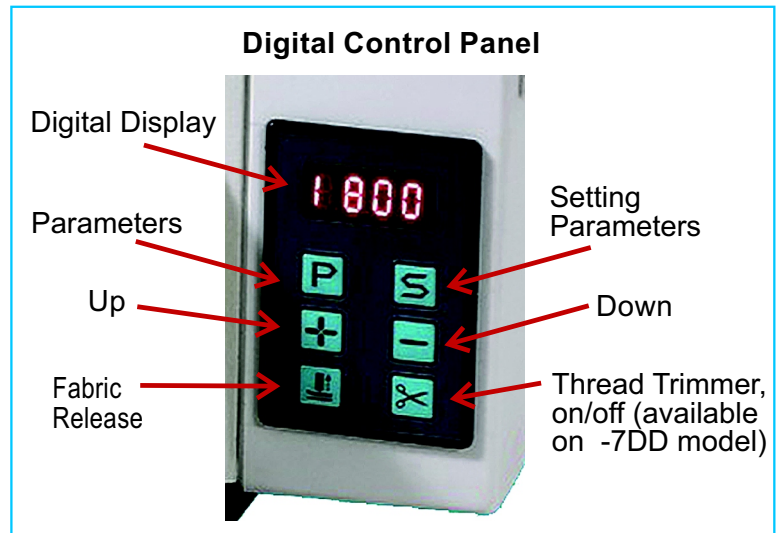


SPECIFICATIONS

CM-101-DD / CM-101-7DD

Speed, Max. (S.P.M.)	2500 *
Stitch Length, Max.	1/4" - 3/8" . (3 - 8 mm)
Needle Style	LWX6T
Looper	4039
Cylinder Diameter	2-1/4" (57 mm)
Work Space (Needle to Arm)	7" (180 mm)
Stitch Type	103

* Speed depends on width of zig-zag, material and thread.

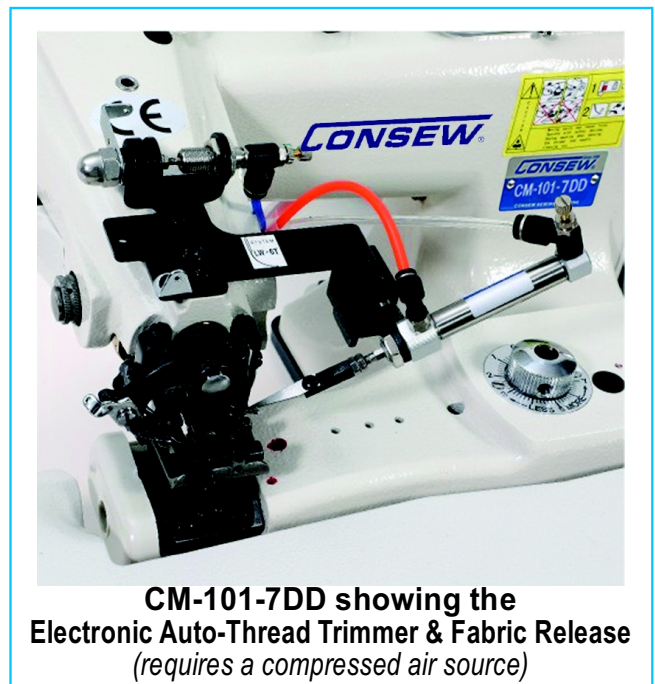

CM-101-7DD showing the Electronic Auto-Thread Trimmer & Fabric Release (requires a compressed air source)

Specifications subject to change without notice.

©2024 Consew USA -1024